

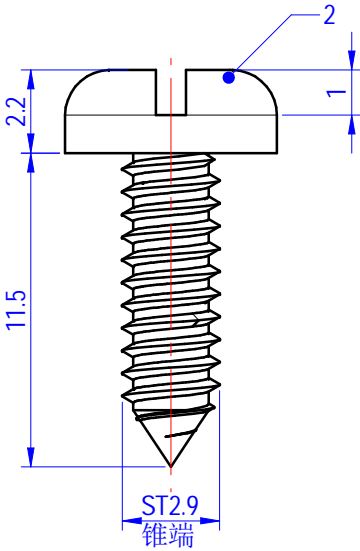


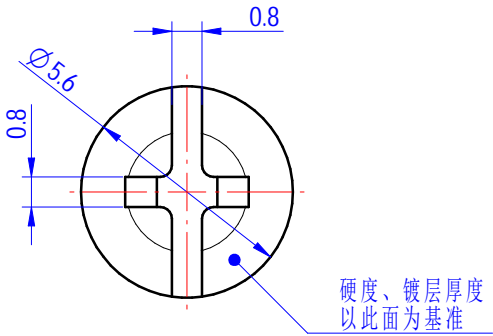


未注公差/General tolerances(mm)													0.1/10
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500 ~ ±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

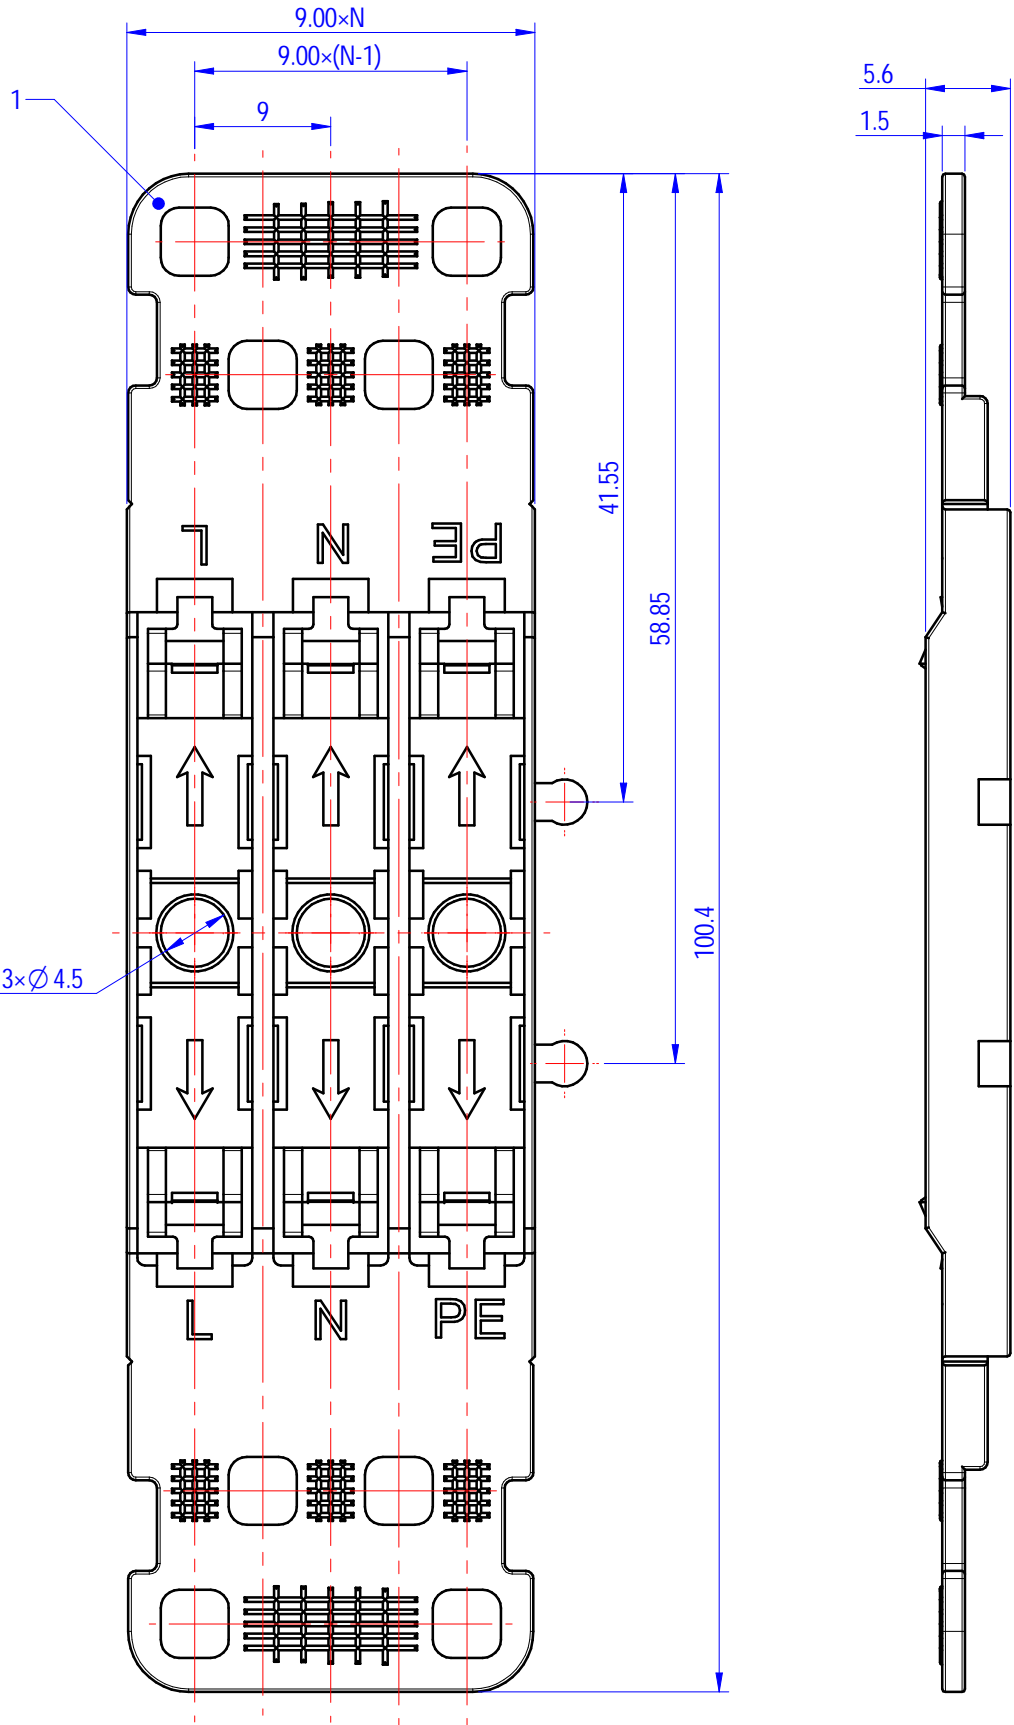

2	Screw	Steel	Ni Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
间距/Pitch(mm)/线数范围/Poles			9.00/N=02~03P
使用温度范围/Operating temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes

		MATERIAL:		SURFACE/COLOR:		
APPD: 蓝贵凡		MAT NO./REV:		MAT STATUS: 小批量		
CHKD: 朱伟明		NAME DGBSC-ACC03-XXP-1Y-00Z (H)				
DRAFT: 孙科豪						
 A3		DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
 A3		200290066	CUSTOMER DRAWING	已发布	1:1	1/1

00	REV	ECN	DESCRIPTION	DRAFT	DATE