
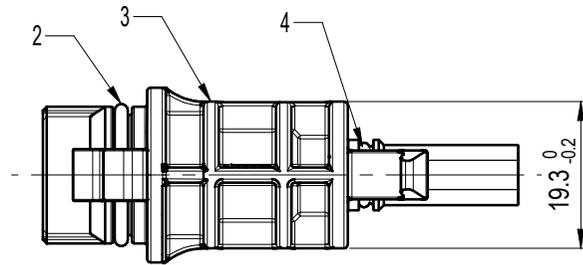

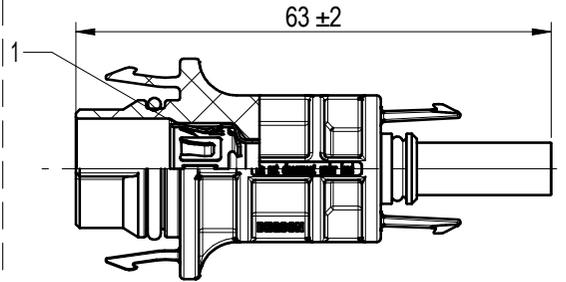


尺寸公差(mm)					0.05/10 ±1'
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	
±0.20	±0.30	±0.50	±0.70	±1.00	

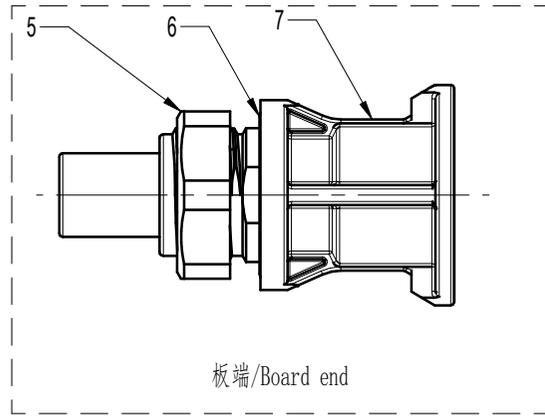

工作温度/Operating temperature	-40° C - 85° C
防护等级/Levels of protection	IP 68 (互配/mated)
额定电压/Rated voltage	1500V DC
额定电流/Rated current	35A
保险丝尺寸/Fuse size	10×38mm
接触阻抗/Contact resistance	≤3mΩ

7	板端外壳/HSG	1
6	O-型圈/O-Ring	1
5	螺母/Screw	1
4	O-型圈/O-Ring	1
3	塑料外壳/HSG	1
2	O-型圈/O-Ring	1
1	端子/Terminal	1
序号/Item	名称/Description	数量/QTY

		MATERIAL: 材质	SURFACE/COLOR: 表面处理			
		MAT NO./REV: 物料编码 / 版本	MAT STATUS: 物料状态			
APPD: 核准人	核准日期	NAME				
CHKD: 审核人	审核日期	PV-DCFU-FM-PSC-01P-30A-8-00Z (H)				
DRFT: 设计人	设计日期	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
		图号	图纸类型	图纸状态	1:1	1/1

图纸版本	ECN	变更描述	设计人	设计日期
REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by DEGSON. All rights reserved for patent. 除专利权明确授权，否则禁止转让、复制、印刷、交流本文件的内容。未经书面授权，不得擅自复制或传播。 版权所有，侵权必究。