



未注公差/General tolerances (mm)												0.1/0 1/2 2"		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315		>400	
~	~	~	~	~	~	~	~	~	~	~	~		~	
3	6	10	18	30	50	80	120	180	250	315	400		500	
± 0.12 ± 0.18 ± 0.22 ± 0.26 ± 0.31 ± 0.37 ± 0.57 ± 0.80 ± 0.93 ± 1.05 ± 1.15 ± 1.60 ± 2.20 ± 2.50														
UL 标准/UL Standard:												B	C	F
额定电压/电流/Rated Voltage(V)/Current(A)												600/25	600/25	630/25
IEC 标准/IEC Standard:														
过压类别/Overvoltage Category/污染等级/Pollution Degree												III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)												630/25	600/25	1000/25
额定脉冲电压/(kV)/Rate Impulse Voltage(kV)												6	6	6
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)												18~ 10/ 1.0~ 6.0		
间距/Pitch(mm)/线数范围/Poles												7.5/N= 02~ 12P		
剥线长度/Stripping length (mm)												12		
使用温度范围/Operating temperature(°C)												-40~ + 105		
符合RoHS环保要求/Conform to RoHS												Yes		



02P

5.92

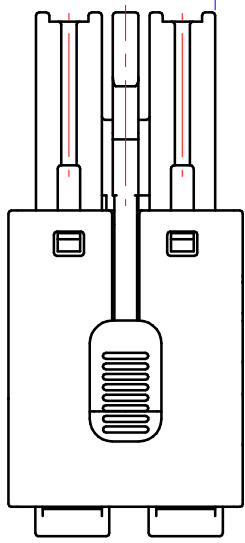



03P

7.5

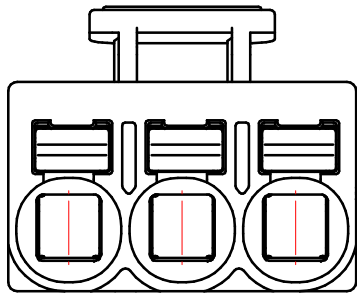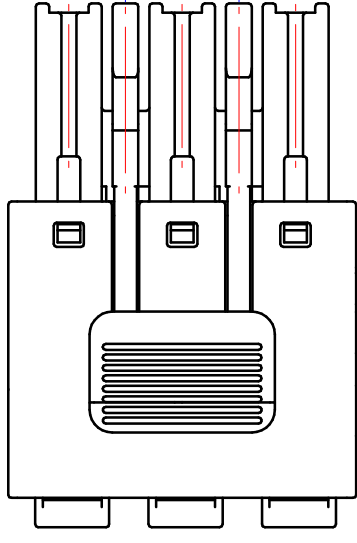



04P

15

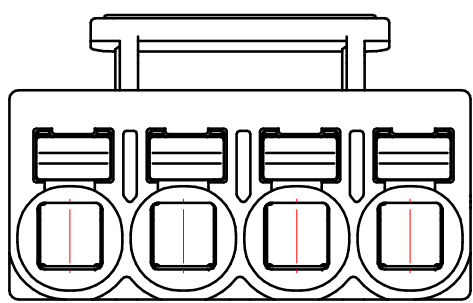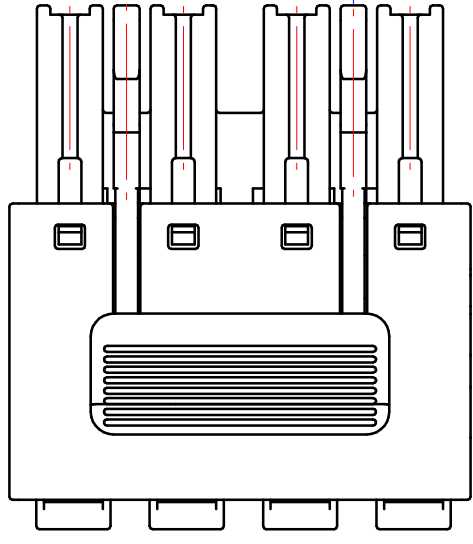



05P

7.5




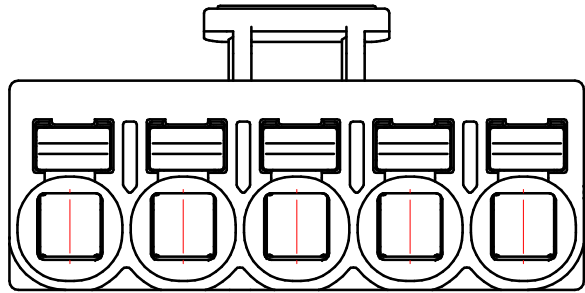
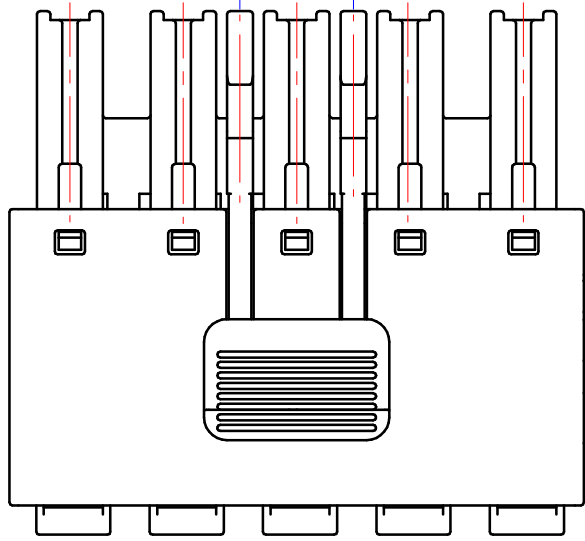


07, 09, 11P

22.5

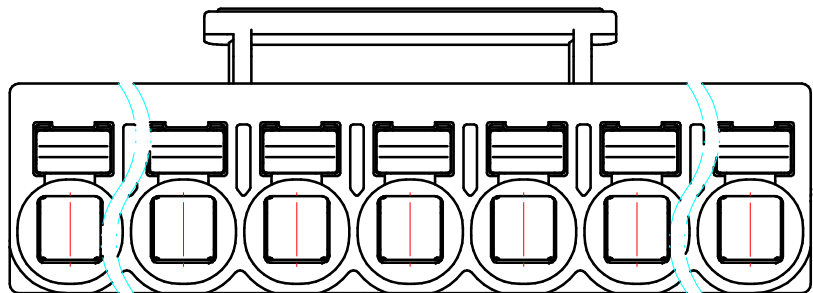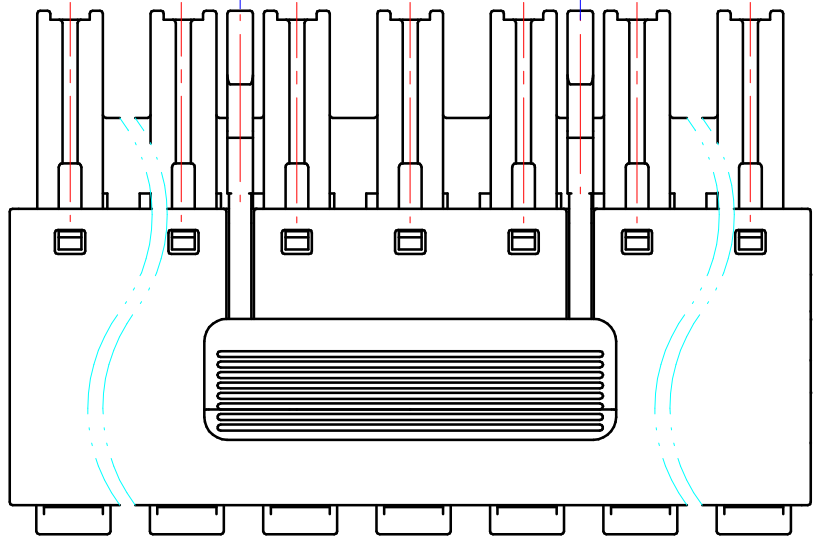

06, 08, 10, 12 P

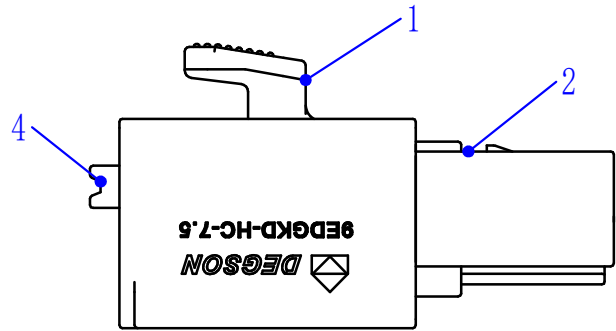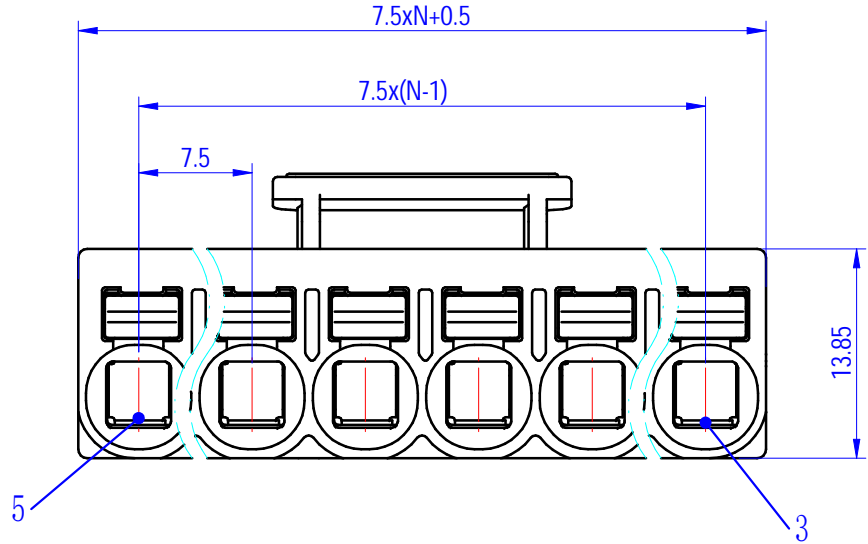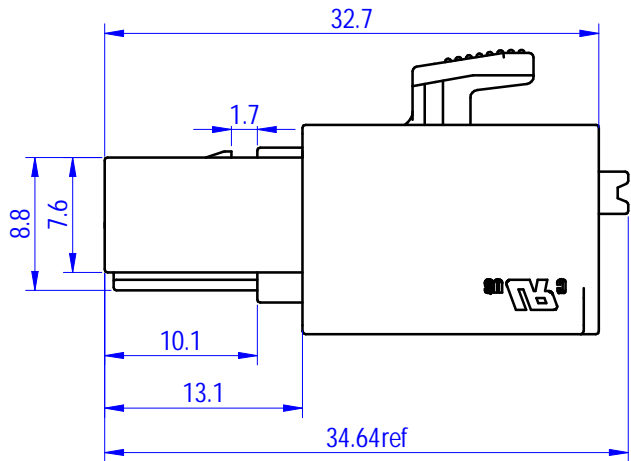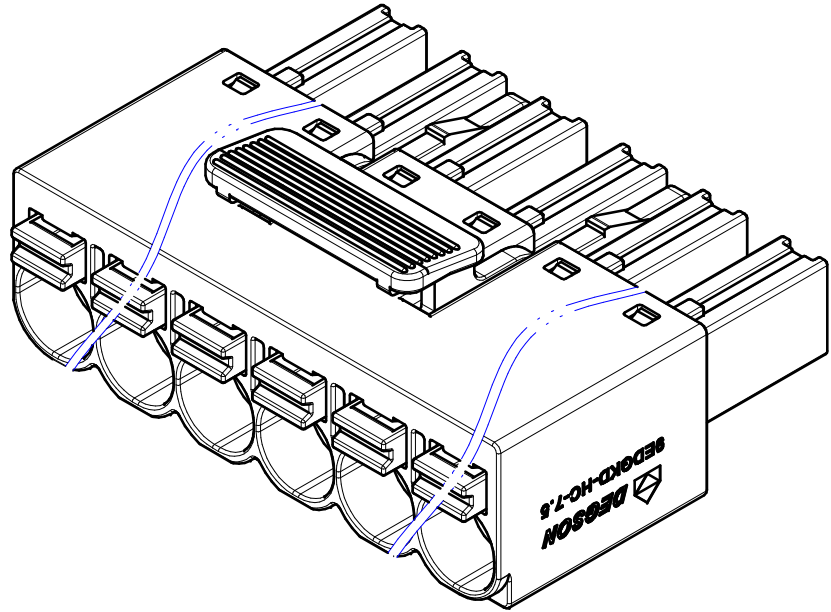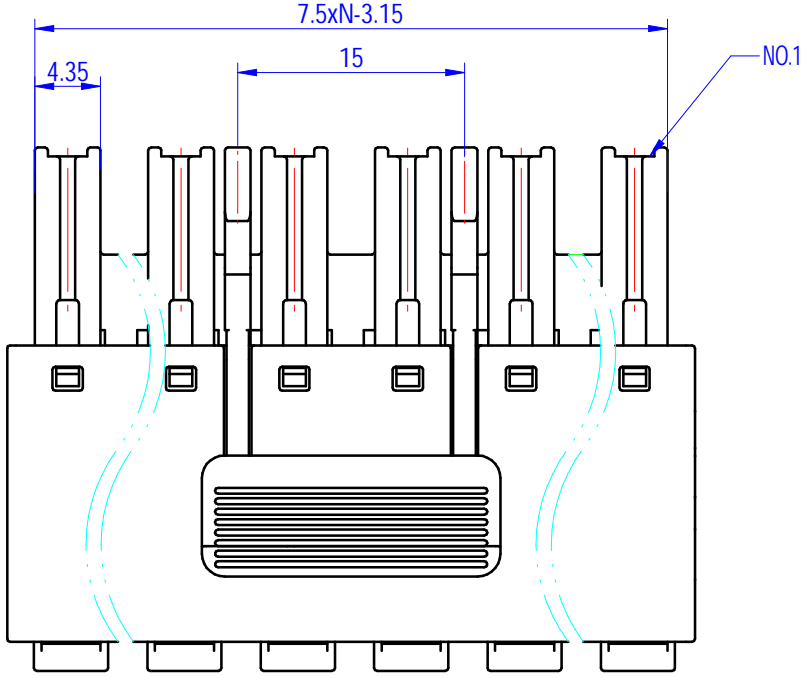

5	Spring	Stainless steel	/
4	Button	PA66+GF	UL94V-0
3	Clamp	Copper alloy	Sn Plated
2	Cover	PA66+GF	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DEGSON		MATERIAL:		SURFACE/COLOR:		Bottom:PANTONE 1505U,Other:PANTONE 419C	
APPD:	兰春华	2023.08.22	NAME	MAT NO./REV:	10020008998-1 / 00	MAT STATUS:	work
CHKD:	李耀志	2023.08.22	9EDGKD-HC-7.5-XXP-1Y-00Z(H)				
DFT:	李耀志	2023.08.22	DRAWING NO.	TYPE	CUSTOMER DRAWING	DRAWING STATUS	work
REV	ECN	DESCRIPTION	DFT	DATE	200112144	SCALE	2:1
						SHEET	1/2