


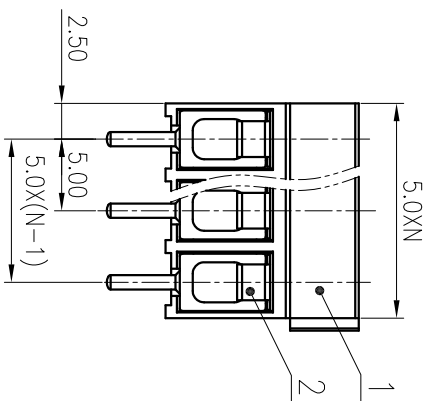



公差/General tolerances(mm)		公差/General tolerances(mm)	
0	>3	>6	>180
~	~	~	~
3	6	10	180
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
0.1/1.0	>500	~	~
~	~	~	~
±2	±2	±2	±2

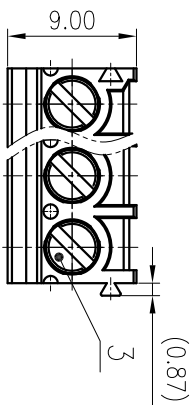

PCB LAYOUT

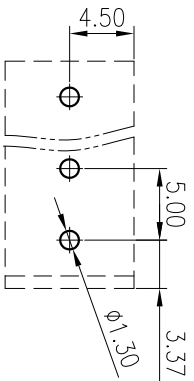

4	Pin header	Copper alloy	Sn plated
3	Screw	Steel	M3/Zn plated
2	Spring	Stainless steel	
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
UL 标准/UL Standard:		B	C
额定电压/Rated Voltage(V)	Current(A)	300/20	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等		III/2	
额定电压/电压/Rated Voltage(V)	Current(A)	250/25	
工频耐压/Withstanding voltage(V/Min)		AC2000	
螺丝扭矩/Torque Tightening(N·m/Lb·in)		M3: 0.5/4.43	
导线范围(硬导线/软导线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.5~4/20~12	
间距/Pitch(mm)/导线范围/Poles		5.0/N=02~12P	
绝缘长度/Stripping length(mm)		6.5	
使用温度范围/Operating Temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD: LanChH	2020.05.20
CHKD: YuJZ	2020.05.20
DRAFT: ChenZh	2020.05.20
NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
DRAWING NO.:	10001993
TYPE:	CUSTOMER DRAWING
SCALE:	2:1
SHEET	1/1

REV	ECN	DESCRIPTION	DRAFT	DATE