
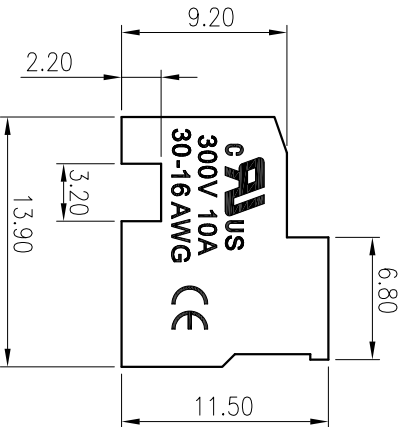
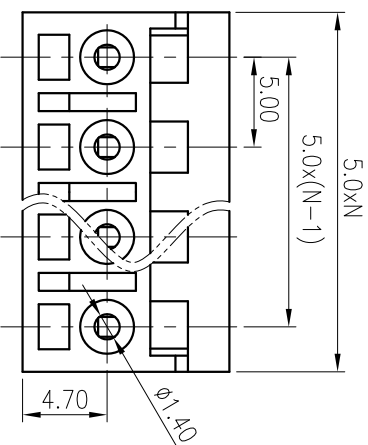

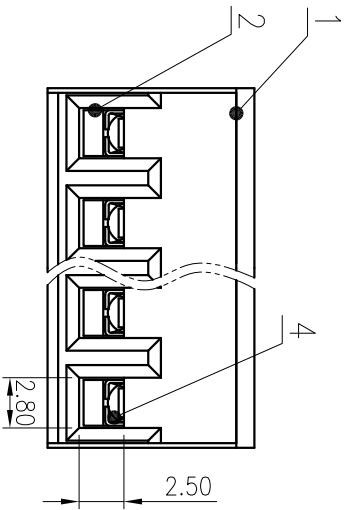


0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	±2
注:公差/General tolerances(mm)													
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

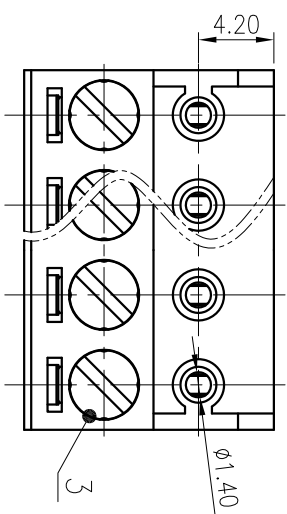

4	Clamp	Copper alloy	Sn plated
3	Screw	Steel	M2.5/Zn plated
2	Cage	Copper alloy	M2.5/Ni plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

REV	ECN	DESCRIPTION	DRT	DATE
1				

MATERIAL:	
MAT NO.:	/
STATUS:	/
APPD:lan	CHH 2020.05.21
CHKD:Yu	JZh 2020.05.21
DRT: Wu	LF 2020.05.21
NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
DRAWING NO.:	DG332W-5.0-XXP-1Y-00A(H)
TYPE:	CUSTOMER DRAWING
SCALE:	2.5:1 SHEET
REV	TO
1/1	1/1

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage (V)	300/10	/	300/10
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage (V)/Current (A)	/	250/12	/
工频耐压/Withstanding voltage (V/1Min)	AC2000		
螺丝扭矩/Torque Tightening (N·m/Lb·in)	M2.5, 0.4/3.54		
线径范围(硬线和软线)/Wire Range (rigid and flexible) (mm ² /AWG)	0.2~1.5/30~16		
间距/Pitch (mm)/线数范围/Poles	5.0/N=02~12P		
剥线长度/Stripping length (mm)	5-6.5		
使用温度范围/Operating temperature (°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
SURFACE:			