

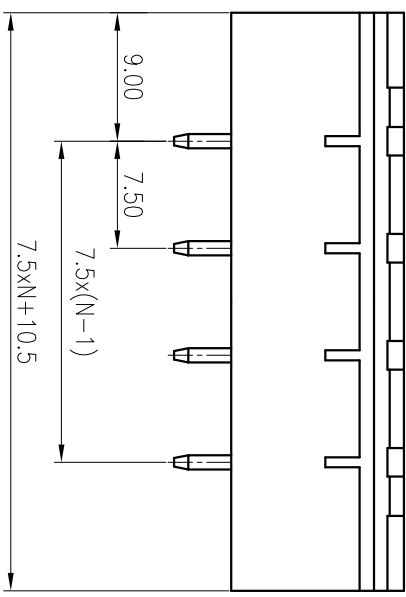
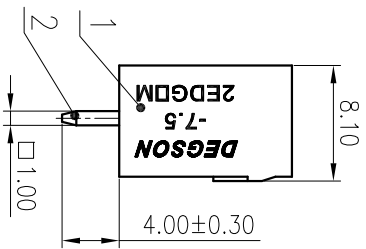
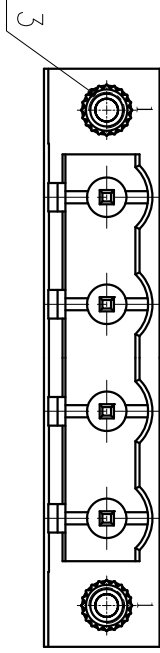


PCB LAYOUT

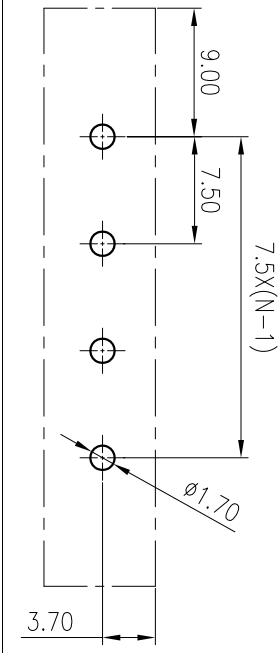

公差带/General	tolerance(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.43	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2	±2

3	Nut	Copper alloy	/
2	Pin	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/额定 Voltage(V)/Current(A)		300/15	300/10
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电流/额定 Voltage(V)/Current(A)		/	400/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4
线圈范围/Poles		N=02~12P	/
使用温度范围/Operating Temperature(°C)		-40~+105	/
符合RoHS环保要求/Conform to RoHS		Yes	/

MATERIAL: SURFACE: Yes

MAT NO.: /

STATUS: /

APPD: Lan CHH 2020.05.21

CHKD: /

DRT: GongYzh 2020.05.21

SIZE: A4

TYPE: CUSTOMER DRAWING

SCALE: 2:1

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

2EDGVM-7.5-XXP-1Y-00A(H)

DRAWING NO.: 10002013

REV T0

SHEET 1/1

REV	ECN	DESCRIPTION	DRT	DATE