
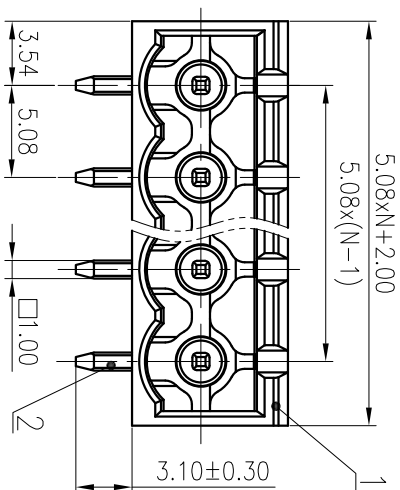
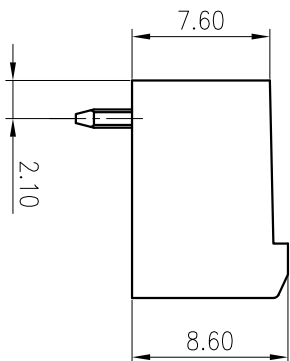




未注公差/General tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
±	±Z	±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

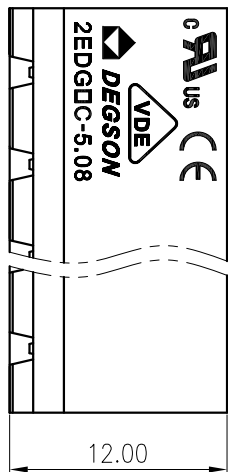

ITEM	NAME OF PART	MATERIAL	NOTES
2	Pin header	Copper	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/15	/	300/10
VDE 标准/VDE Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/20	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
间距/Pitch(mm)/线数范围/Poles	5.08	N=02~24P	
使用温度范围/Operating Temperature(°C)	-40°C	~+105°C	
符合RoHS环保要求/Conform to RoHS	Yes		

PCB LAYOUT

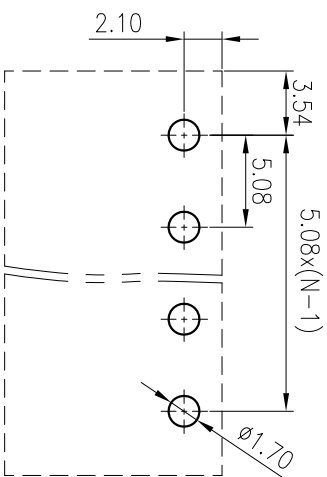

MATERIAL: /

SURFACE: /

MAT NO.: /

STATUS: /

APPD: LanChH 2020.03.24

CHKD: GongZh 2020.03.24

DRT: LiY 2020.03.24

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

NAME: ZEDGRC-5.08-XXP-1Y-100A(H)

DRAWING NO.: 10001580

TYPE: CUSTOMER DRAWING

REV	EON	DESCRIPTION	DRT	DATE	SIZE: A4	SCALE: 2.5:1	REV	TO
					mm inch			