
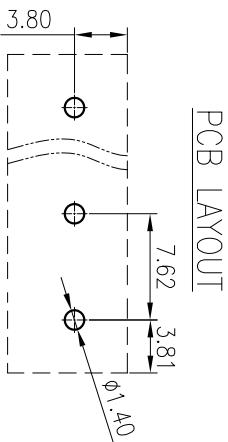

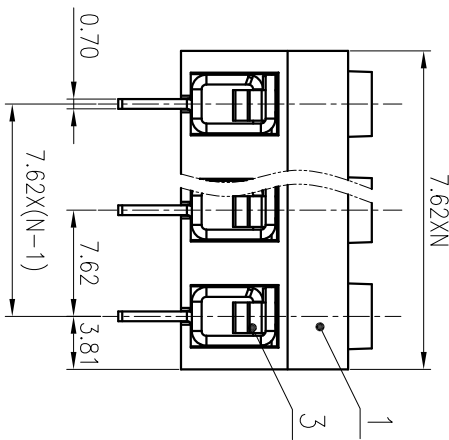



标注公差/General Tolerances(mm)		0.1/10											
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	±2
~	3	6	10	18	30	50	80	120	180	250	315	400	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

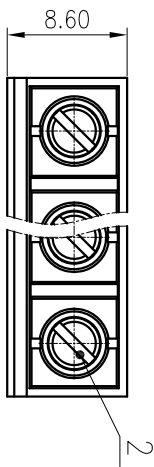

3	Pin	Copper alloy	Sn plated
2	Screw	Steel	M2.5/Zn plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电压/Rated Voltage(V)/Current(A)		300/15	/ 300/10
IEC 标准/IEC Standard:			
额定电压/电压/Rated Voltage(V)/Current(A)		450/22	
工频耐压/Withstanding voltage(V/1Min)		AC2000	
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M2.5, 0.4/3.54	
线径范围(硬线/软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.5~2.5/22~12	
间距/Pitch(mm)/线数范围/Poles		7.62/N=02~12P	
剥线长度/Stripping length(mm)		6~7	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS/符合RoHS要求/Conform to RoHS		Yes	

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	NAME: DG167-7.62-XXP-1Y-00A(H)	
APPD: LanChH 2020.05.26		DRAWING NO.:	10002121
CHKD: YuJZ 2020.05.26		TYPE:	CUSTOMER DRAWING
DRAFT: ChenZh 2020.05.26		SCALE:	2:1

REV	EON	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				

SIZE: A4	1/1
SCALE: 2:1	SHEET 1/1

D

C

B

A

2

3

4

5

6

D

C

B

A