



REVISION RECORD



REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



(60.0)

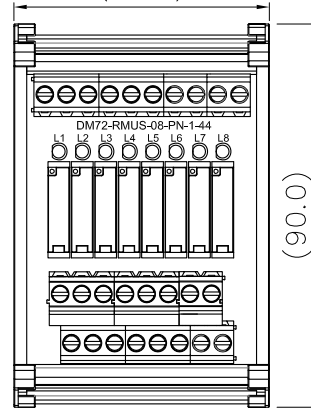

(90.0)

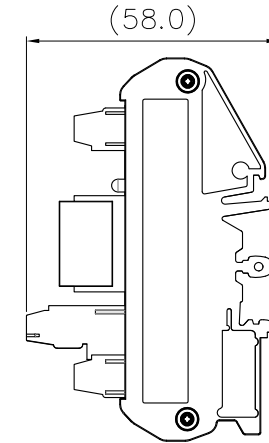

Specifications

Rated voltage	DC24V
Rated current	7.5mA
Output Voltage	250V/AC,30V/DC;
output current	5A
contact structure	1 NO
Model	8
Signal input method	PNP+NPN
Mechanical life	$\geq 2 \times 10^7$
Electrical life	$\geq 5 \times 10^4$
Temperature range	- 25℃ ~ +55℃
Status Indicator	YES
Connector digits	/
Stripping Length	6-7mm
Terminal torque	0.4Nm (3.54Lb-In)
Input port/wire diameter	DG500-5.08/1.0-2.5mm ² /24-12AWG
Output port/wire diameter	DG500-5.08/1.0-2.5mm ² /24-12AWG
Installation Method	35mmDIN

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: DM72-RMUS-08-PN-1-44-0XAH		
	CHKD:	TITLE: ASSEMBLY DRAWING		
	DRFT:	DRAWING NO.: DM72-RMUS-E02	REV	
 THIRD ANGLE PROJECTION		DRAWING NO.: DM72-RMUS-E02	SHEET	1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1