
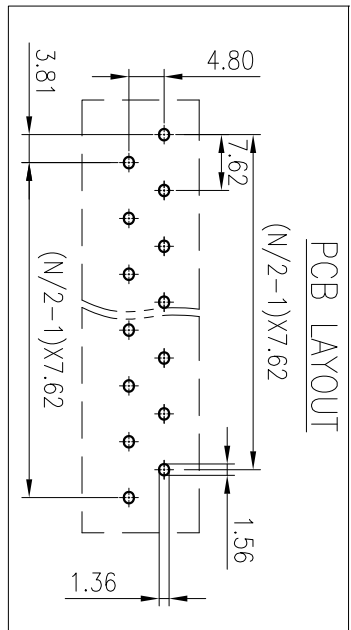
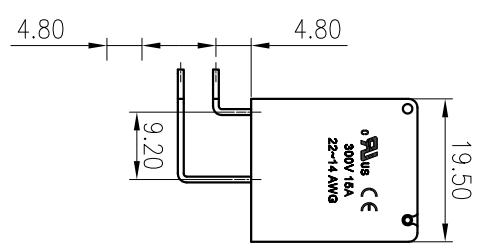

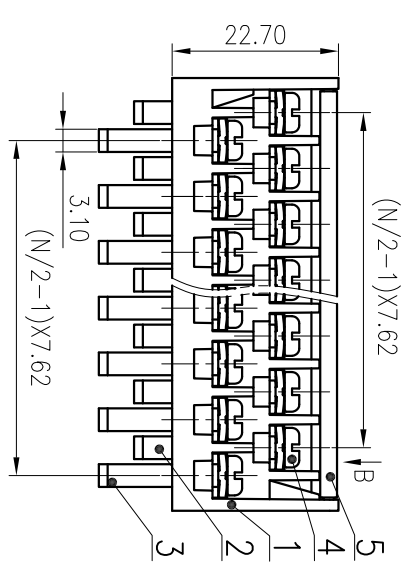
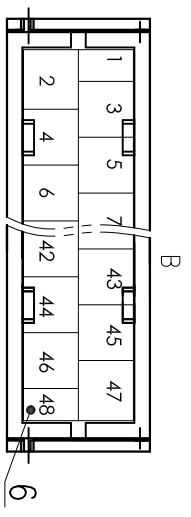


Pitch Range In mm	Nominal Dimension Range In mm						- 0.1/10 150 150 150 ±2°	
	Over 6 TO 10 6	Over 10 TO 10 24	TO 30	Over 30 TO 60 100	Over 60 TO 100 150	Over 100 TO 150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

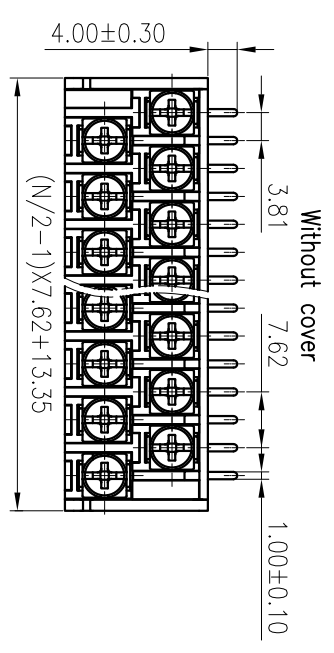

ITEM	NAME OF PART	MATERIAL	NOTES
6	Label	Paper	
5	Cover	PC	UL94V-2
4	Screw	Steel	Ni Plated
3	Long Pin header	Copper alloy	Sn Plated
2	Short Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard: B C D
 额定电压/电池/Rated Voltage(V)/Current(A) 300/15 / 300/10
 EC 标准/EC Standard: M3, 0.5/4.43
 螺丝扭矩/Torque Tightening(N·m/Lb·in) 1.4~2.2
 线径范围(导线)/Wire Range(flexible)(mm²/AWG) 7.62/N=06~48P(偶数)
 间距/Pitch(mm)/线数范围/Poles -40~+105
 使用温度范围/Operating temperature(°C) Yes
 符合RoHS环保要求/Conform to RoHS Yes

MATERIAL: /
 MAT NO.: /
 STATUS: /
 APPD: /
 CHKD: /
 DRAFT: WU NK 2020.06.17
 NAME: **DEGSON**® NINGBO DEGSON ELECTRICAL CO., LTD
 DRAWING NO.: DG24-3-C02
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE