
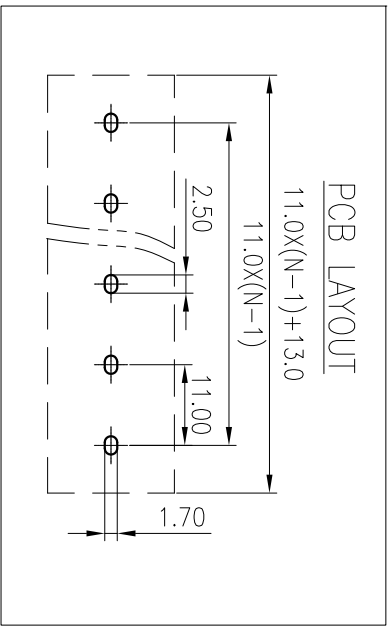



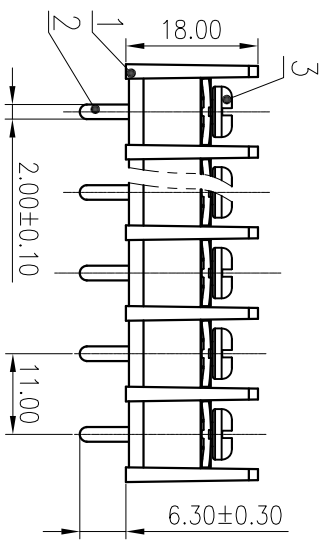


Pitch	Range In mm			Nominal Dimension Range In mm			- 0.1/10 /
	Over 6	Over 10	Over 10	Over 30	Over 60	Over 100	
T0	T0	T0	T0	T0	T0	T0	≤
6	10	24	30	60	100	150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2°

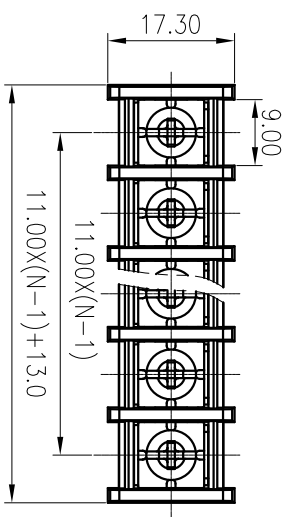

3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B C D	
额定电压/电流/Rated Voltage(V)/Current(A)		300/30	300/10
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		300/20	300/20
额定脉冲电压/峰值电压/Rate Impulse Voltage(KV)		4	4
额定脉冲转矩/峰值转矩/Torque Tightening(N·m/Lb·in)		M4, 1.2/10.53	4
线径范围/线径范围/Wire Range(flexible)(AWG)		22~10	
可焊/Pitch(mm)/线径范围/Poles		11.00/N=02~22P	
剥线长度/Stripping length(mm)		12	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRFT: WU NK 2020.05.28

SIZE: A4

TYPE: CUSTOMER DRAWING

SCALE: 1:1

REV	ECN	DESCRIPTION	DRFT	DATE

NAME: **DEGSON** NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: DG65B-C03

NAME: DG65C-B-XXP-1Y-00A(H)

REV T0

SHEET 1/1

D C B A

1 2 3 4 5 6