





公差/公差 (General tolerances)(mm)		0.1/10
0	>3	±0.1/±0.10
~3	~6	±0.12/±0.12
~6	~10	±0.26/±0.26
~10	~18	±0.31/±0.31
~18	~30	±0.37/±0.37
~30	~50	±0.57/±0.57
~50	~80	±0.80/±0.80
~80	~120	±1.05/±1.05
~120	~180	±1.15/±1.15
~180	~250	±1.60/±1.60
~250	~315	±2.20/±2.20
~315	~400	±2.50
~400	~500	±2.7
~500	>500	±2.7

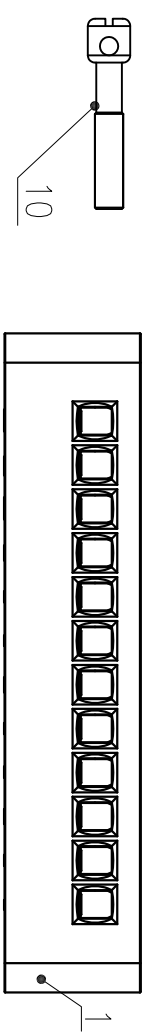





Screw 4
(Separate packing)

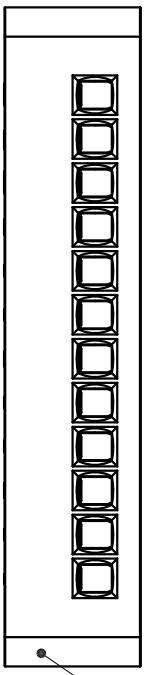


Cover
(Separate packing)

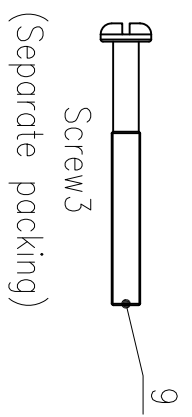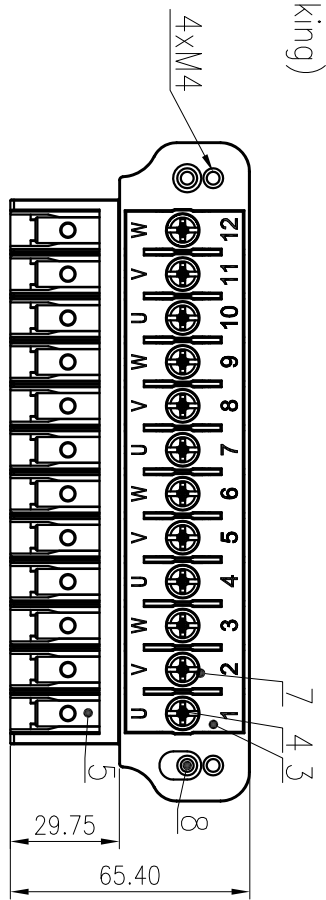

Screw 3
(Separate packing)

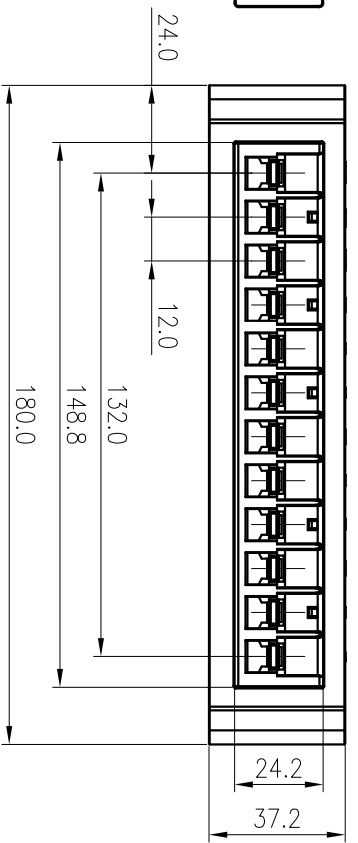

Screw 2
(Separate packing)

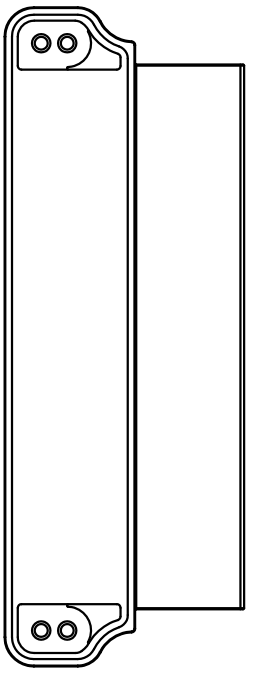

10	Screw 4	Steel	Ni Plated/M4
9	Screw 3	Steel	Ni Plated/M4
8	Fixed part	Copper alloy	Ni Plated
7	Screw 1	Steel	Zn Plated/M6
6	Screw 2	Steel	Zn Plated/M4
5	Current carrier	Copper	Sn Plated
4	Block	Steel	Zn Plated/M6
3	Cover 2	PC	UL94V-0
2	Cover	PC	UL94V-0
1	Housing	PC	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES			
			A	B	C	D
UL 标准/UL Standard:						
额定电压/电流/Rated Voltage(V)/Current(A)			300/60	300/60	300/60	300/710
EC 标准/IEC Standard:						
螺丝扭矩/Torque Tightening(N·m/Lb.in)			M6, 3.0/26.6	M4, 1.2/10.6		
导线范围(硬导线/软线)/Wire Range(rigid and flexible)(AWG)			22~3			
间距/Pitch(mm)/线数范围/Poles			12.0/12P			
剥线长度/Stripping length(mm)			17~18			
使用温度范围/Operating temperature(°C)			-40~+80			
符合RoHS环保要求/Conform to RoHS			Yes			

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

SURFACE: /

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG97-A-12P-1Y-00A(H)

DRAWING NO.: 12000360

TYPE: CUSTOMER DRAWING

SCALE: 1:2

REV	REV	REV
1/1	1/1	1/1