
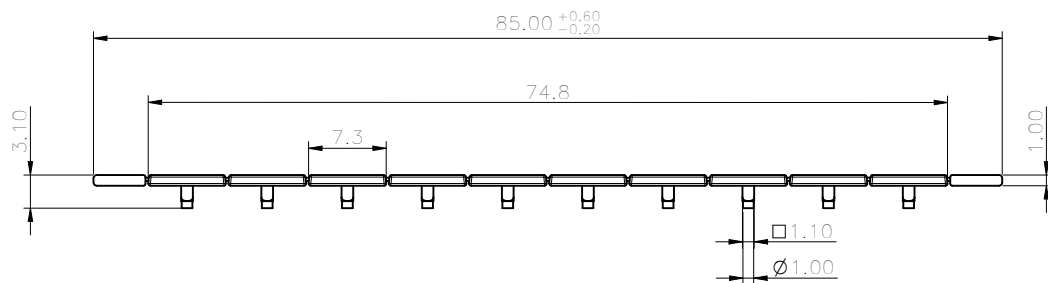


未注公差(General tolerances (mm))													D
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~ 3	~ 6	~ 10	~ 18	~ 30	~ 50	~ 80	~ 120	~ 180	~ 250	~ 315	~ 400	~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

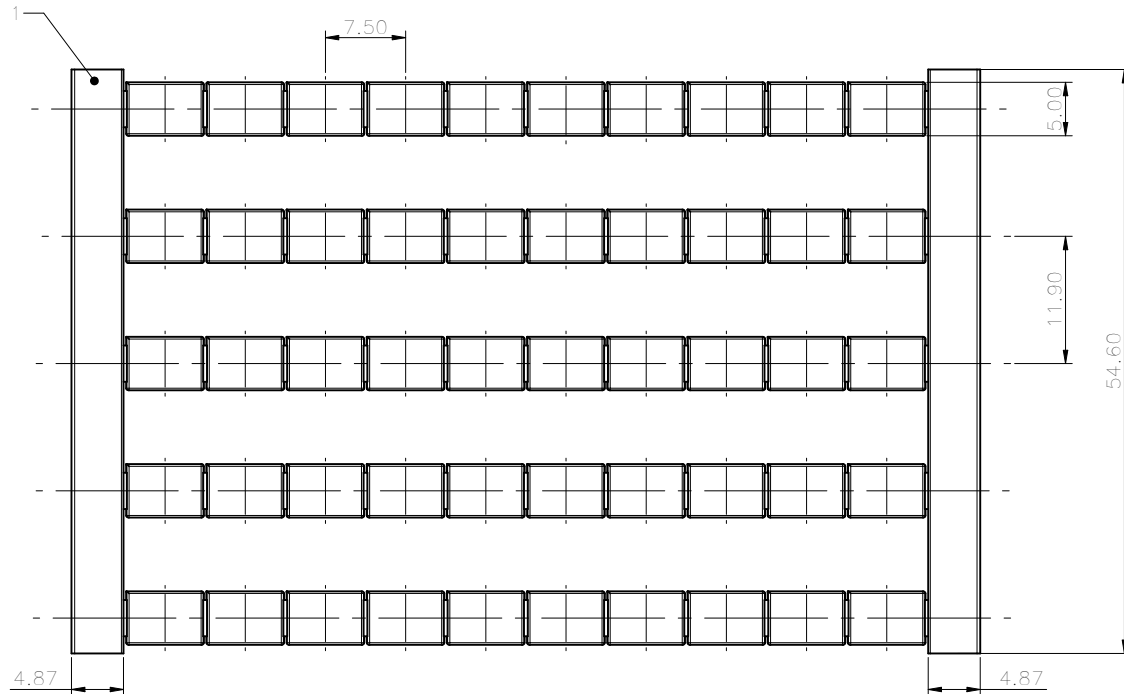

Note: The A&Z(H) in the name means:A(H)and Z(H).

1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
间距/Pitch(mm)/线数范围/Poles		7.50N=50P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS 环保要求/Conform to RoHS		Yes	

DIIGSON		MATERIAL:		SURFACE/COLOR:	
MAT NO./REV:		- / 00		MAT STATUS: 批量	
APPD: 蓝美凡	2022.11.10	NAME			
CHKD: 曹利彬	2022.11.10	TZB4-50P-1Y-00A&Z(H)			
DRAFT: 姜民洁	2022.11.10	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
		200057755	CUSTOMER DRAWING	已发布	2:1
				SHEET	1/1

REV	ECN	DESCRIPTION	DRAFT	DATE	SCALE	SHEET
00						

Transfer or duplication of this document as well as the utilization or reproduction of its contents without the written permission of the copyright holder is prohibited. All rights reserved for patent.