Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。本公司保留对涉及实用、发明专利或外观设计专利的所有权利。

未注公差/General tolerances(mm)

0~3	>3~6	>6~10	>10~18	>18~30	>30~50	>50~80	>80~120	>120~180	>180~250	>250~315	>315~400	>400~500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

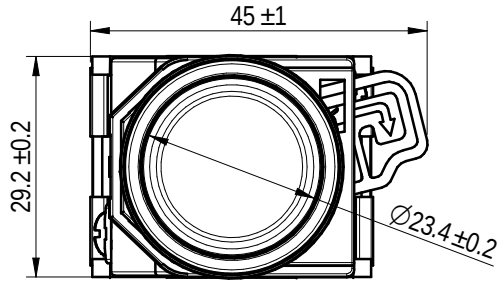

DT22A - FXD X / Y AC/DCZV

(Series No.)

(Type of actuator): FRD: flat reset indicator
FLD: flat lock indicator

(Contact form): 10: 1NO
01: 1NC
11: 1NO1NC

(Color): RD: (Red)
GN: (Green)
YE: (Yellow)
WH: (White)
BU: (Blue)

(Voltage grade):
AC/DC: 6/12/24/36/48/110/220V
AC: 110/220/380V

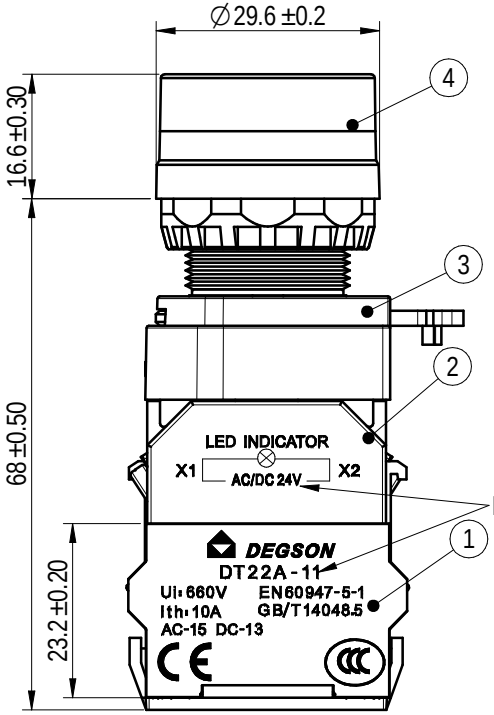

Print content with the name of the product

ITEM	NAME OF PART	MATERIAL	NOTES
4	Button head	/	/
3	Holding screw	/	/
2	Resistance module	/	/
1	Contact module	/	/

使用温度范围/Operating temperature(°C)	-25～+55(无冰冻)
使用湿度范围/Operating humidity(%RH)	45～85
接触电阻/Contact resistance(mΩ)	≤50
绝缘电阻/Insulation resistance(mΩ)	≥100
工频耐压/Power frequency withstand voltage	1890VAC/50Hz/60s
耐振动性/Vibration resistance	振幅约1.0mm/50Hz
耐冲击性/Shock resistance	＞10g
机械寿命/Mechanical life	≥200万次
电气寿命/Electrical life	≥20万次
接线/Connection	螺纹连接，线直径2x1.5mm 最大界限插片 6.3x0.8mm
符合RoHS环保要求/Conform to RoHS	Yes
标准颜色编号/Standard color number: PANTONE / RAL	/

REV	ECN	DESCRIPTION	DRFT	DATE
00		New Drawing	马恩开	2022.10.12

DEGSON

APPD:	李根劳	2022.10.12
CHKD:	马恩开	2022.10.12
DRFT:	马恩开	2022.10.12

A4 mm (inch)

MATERIAL: SURFACE/COLOR:

MAT NO./REV: / 00 MAT STATUS: 小批量

NAME: DT22A-FXDX/YAC/DCZV

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200113446	CUSTOMER DRAWING	work	1:1	1/1