
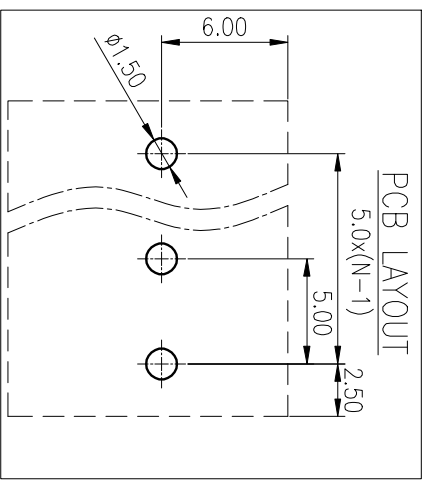
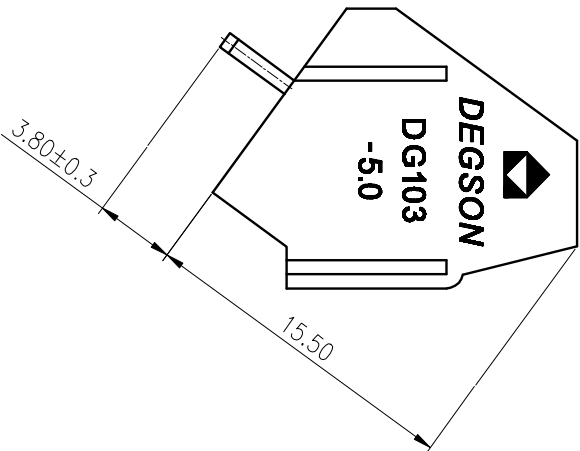
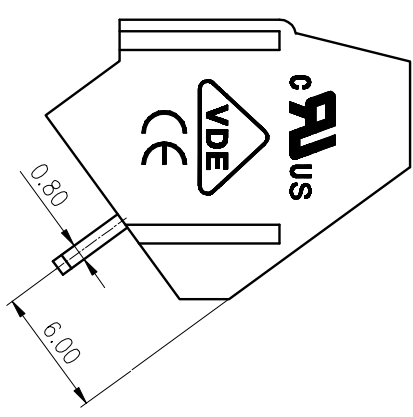
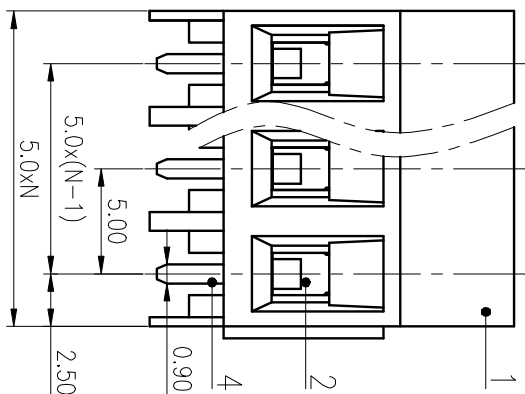


公差等级/General Tolerances(mm)		0.1/10	
0	>3	>6	>120
~	~	~	~
3	6	10	180
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
±Z	±Z	±Z	±Z

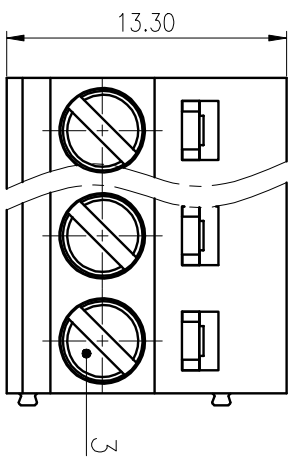

ITEM	NAME OF PART	MATERIAL	NOTES
4	Pin header	Copper alloy	Sn plated
3	Screw	Steel	M3/Zn plated
2	Cage	Copper alloy	M3/Ni plated
1	Housing	PA66	UL94V-0

REV	ECN	DESCRIPTION	DRT	DATE
1				

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	DG103-5.0-XXP-1Y-1000A(H)	
APPD:	LI GL 2020.06.22	DRAWING NO.: DG103-5.0-C30	
CHKD:	Moo J 2020.06.22	TYPE: CUSTOMER DRAWING	
DRT:	Hoo YH 2006.03.20	SCALE:	3:1
SIZE: A4		SHEET 1/1	

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2
绝缘/Insulation Degree	/	250/24	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	AC2000	/
工频耐压/Withstanding voltage(V/Min)	/	M3, 0.5/4.43	/
螺栓扭矩/螺栓预紧力/Wire Tightening(N·m/Lbin)	/	0.2~2.5/24~12	/
线芯范围/导线规格/Wire Range(rigid and flexible)(mm²/AWG)	/	5.0/N=02~24P	/
间距/Pitch(mm)/线数/Number of Poles	/	7	/
引线长度/Stripping length(mm)	/	-40~+105	/
使用温度范围/Operating Temperature(°C)	/	Yes	/
符合RoHS环保要求/Conform to RoHS	/		