

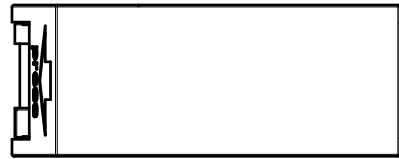

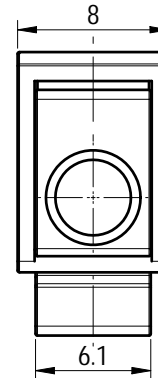


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in advance. Violations will be punished. Weights reserved for patent. Utility model or design registrations. 除专利等明确标注外，其他标注均非强制性。未经授权，不得复制或传播。本公司保留对涉及发明、实用新型和外观设计的所有权利。

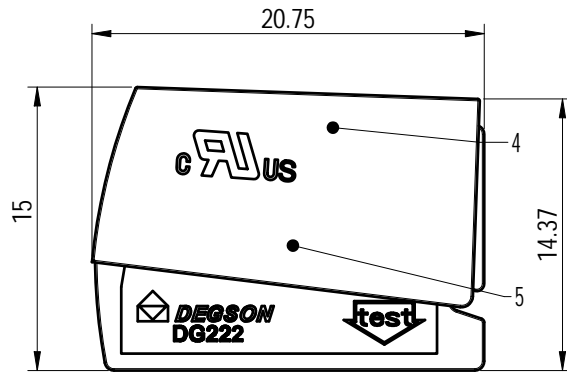

未注公差/General tolerances (mm)													0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/22	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	450/24	/
工频耐压/Withstanding Voltage(V/1Min)	AC2500		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	A:14~12 / 1.0~2.5(Sol) B:22~12 / 0.2~2.5		
剥线长度/Stripping length(mm)	9~10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		



Note:
The A&Z(H) in the name means :A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
5	Current carrier	Copper	Sn plated
4	Spring	Stainless steel	/
3	Cover	PA66	UL94V-0
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0

		MATERIAL: /	SURFACE/COLOR: /	
		MAT NO./REV: - / 00	MAT STATUS: 批量	
APPD: 兰春华	2022.09.16	NAME		
CHKD: 陈招	2022.09.16	DG222-8.0-01P-1Y-00A&Z(H)		
DRFT: 柳学龙	2022.09.09	DRAWING NO. 200025176	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布
REV	ECN	SCALE 2.5:1	SHEET 1/1	

REV	ECN	DESCRIPTION	DRFT	DATE
00			柳学龙	2022.09.09