


未注公差/General tolerances (mm)													0.1/10	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500		>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

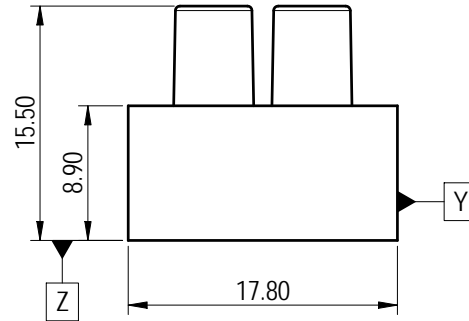

Note: The A&Z (H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
3	Current Carrier	Steel	Zn Plated
2	Screw	Steel	Zn Plated
1	Housing	PA66	UL94V-2

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)	450/32		
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M2.5, 0.4/ 3.56		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	20~12/0.5~4		
间距/Pitch(mm)/线数范围/Poles	8.2N=02~12P		
剥线长度/Stripping length(mm)	9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

DEGSON		MATERIAL:	SURFACE/COLOR:	
APPD: 蓝贵凡 2023.02.24		MAT NO./REV:	/ 00 MAT STATUS: 批量	
CHKD: 曹利彬 2023.02.24		NAME		
DRFT: 孙科豪 2023.02.24		DG8HS-1.2-XXP-1Y-100A&Z(H)		
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200153728	CUSTOMER DRAWING	已发布	2:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00				

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing by DEGSON. All rights reserved for patent. 未经授权复制或传播本文件内容，或在本文件内容基础上进行任何修改、复制或传播，均属侵权行为。DEGSON 保留所有权利。