
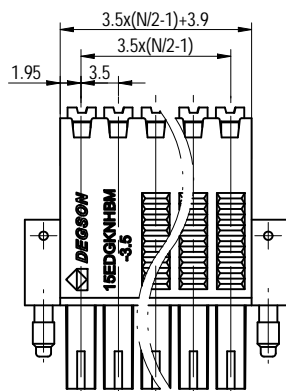

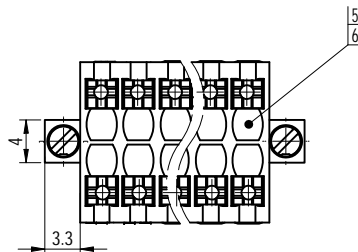




公差/General tolerances (mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~ 3	~ 6	~ 10	~ 18	~ 30	~ 50	~ 80	~ 120	~ 180	~ 250	~ 315	~ 400	~ 500	~ >500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50



Note: The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
6	Clamp	Copper alloy	Sn Plated
5	Spring	Stainless steel	/
4	Button	PA66+GF%	UL94V-0
3	Cover	PA66+GF%	UL94V-0
2	Screw	Steel	Zn Plated
1	Housing	PA66+GF%	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/10	50/10	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	160/10	160/10	320/10
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	28-16 / 0.2-1.5		
间距/Pitch(mm)/线数范围/Poles	3.50/N=04-48P		
剥线长度/Stripping length(mm)	10-11		
使用温度范围/Operating temperature(°C)	-40-+105		
符合RoHS环保要求/Conform to RoHS	Yes		

		MATERIAL:		SURFACE/COLOR:	
APPD: 兰春华	2024.03.18	NAME:		MAT STATUS: 批量	
CHKD: 张玉华	2024.03.18	15EDGKNHBM-3.5-XXP-1Y-00A&Z(H)			
DRAFT: 陈建辉	2024.03.06	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
REV	ECN	DESCRIPTION	DATE	200030289	CUSTOMER DRAWING
02		wipe off VDE mark	陈建辉	2024.03.06	已发布
REV	ECN	DESCRIPTION	DRAFT	DATE	SCALE
					2:1
					SHEET
					1/1

02		wipe off VDE mark	陈建辉	2024.03.06
REV	ECN	DESCRIPTION	DRAFT	DATE

Transfer or duplication of this document as well as the utilization of its contents without the written permission of the copyright holder is prohibited. All rights reserved for patent.