

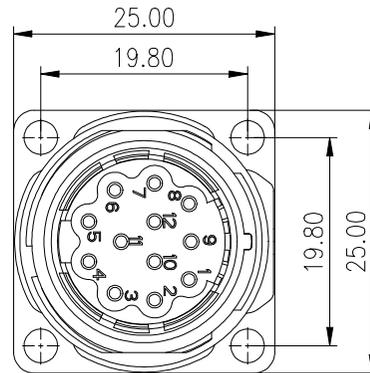



Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交还本文件的内容。侵犯者将承担赔偿责任。未经许可，不得复制或传播本文件。 宁波高松电子有限公司 版权所有。



尺寸公差(mm)					0.05/10 ±T*
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	
±0.20	±0.30	±0.50	±0.70	±1.00	
额定电压电流/Rated Voltage/Current					160V/8A
绝缘电阻/Insulation resistance					≥100MΩ
插拔次数/Mechanical working life(mating cycles)					100
耐电压/Withstanding voltage					2000V AC
重点管控符号/Key controlled symbol					*
包装规范/Packaging specification					SOP-Y-2908
使用温度范围/Operating temperature(°C)					-40~+125
防水等级/Levels of protection					IP67
接线方式/Terminal					铆压
线径范围/Wire range(AWG/mm²)					18~24/0.8~0.2
剥线长度/Stripping length(mm)					4~5
符合RoHS环保要求/Conform to RoHS					Yes

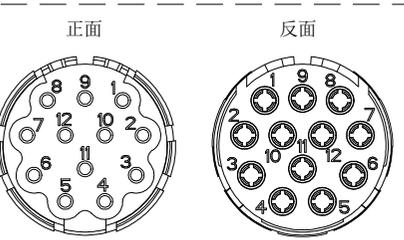

激光打标对照参考序位图

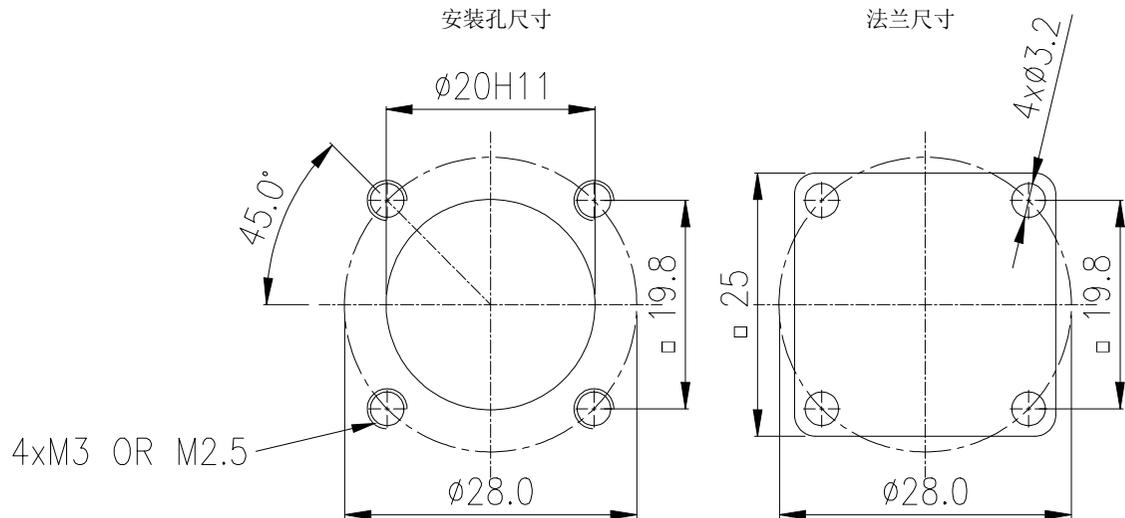

REV	ECN	DESCRIPTION	DRFT	DATE

MATERIAL:	/	SURFACE:	/
MAT.NO.:	20050000017	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:		Description:	
CHKD:		SCSH-M23R-12P-MM-SS7000-00A(H)	
DRFT:	Jiang MX 2021.01.04	DRAWING NO.:	200103316
		REV	T0
		TYPE:	PRODUCT DRAWING
		SCALE:	1:1
		SHEET	1/1