


Wiring diagram

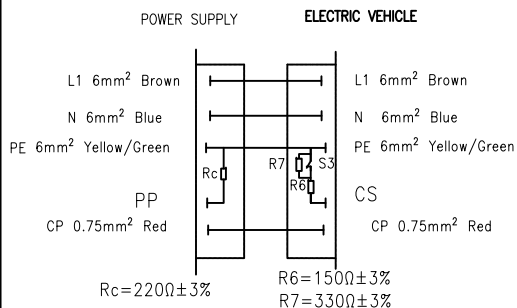




X1 Laser Printing Front Note:

Laser Printing Back Note (Arial):  
MEAC-S-032A-P1-03-5.0M-30AH  
32A 250V AC  
IEC 62196-2:2016  
IP54  
20xxxxxx-xxxx

X2 Laser Printing Front Note (Arial):  
MAAC-S-032A-V-03-5.0M-30AH  
32A 250V AC  
IEC 62196-2:2016  
IP54  
20xxxxxx-xxxx

Laser Printing Back Note:

未注公差/General tolerances(mm)											0.1/10 ±2'		
0 ~ ±0.12	>3 ~ ±0.18	>6 ~ ±0.22	>10 ~ ±0.26	>18 ~ ±0.31	>30 ~ ±0.37	>50 ~ ±0.57	>80 ~ ±0.80	>120 ~ ±0.93	>180 ~ ±1.05	>250 ~ ±1.15		>315 ~ ±1.60	>400 ~ ±2.20

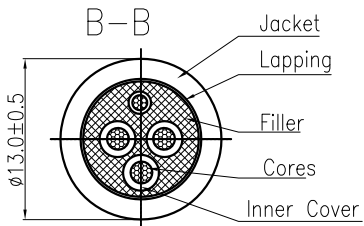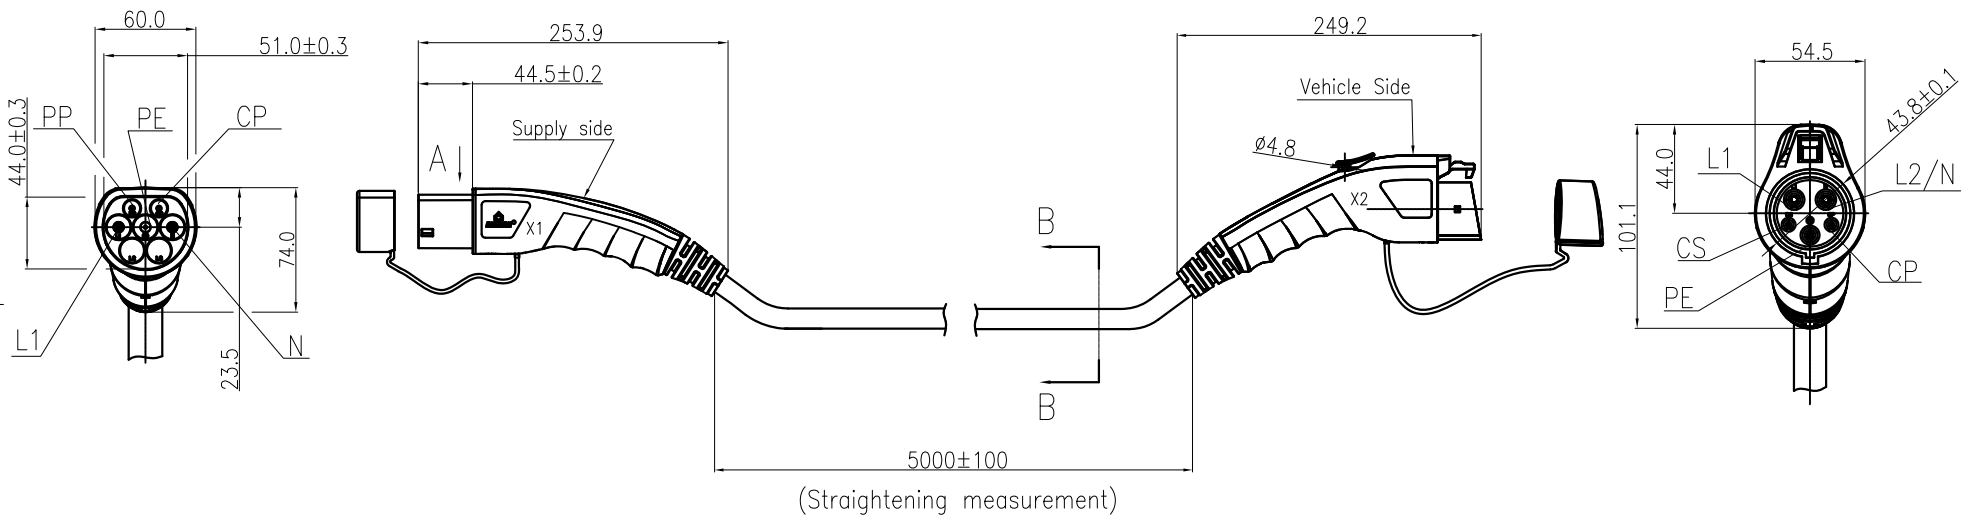

额定电压电流/Rated Voltage/Current	250V AC/32A
绝缘电阻/Insulate Resistance	>100MΩ,500V DC 1min
耐压/Withstanding Voltage	L、N and PE ,2500V AC 1min L and N ,2500V AC 1min
防护等级/Ingress Protection	IP54
插拔寿命/Insertion/Pullout Times	10,000 Times
插拔力/Insertion/Pullout Force	<100N
使用温度范围/Operating temperature(°C)	-30~+50
线材规格/Cable specification	3*6mm²+1*0.75mm² Black
标准/Reference standard	IEC 62196-2:2016
符合RoHS环保要求/Conform to RoHS	Yes

		MATERIAL:	SURFACE/COLOR:		
MAT NO./REV: DO-1		MAT STATUS:			
APPD: Ye DB 2024.09.29	CHKD: Dong RT 2024.09.29	NAME MHAC-S-032A-VP1-03-5.0M-30A(H)			
DRFT: Hu MY 2024.09.29	DRAWING NO.		TYPE	DRAWING STATUS	SCALE
A4		CUSTOMER DRAWING			1:3
				SHEET	1/1

REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or common position of its contents are prohibited, unless authorized in writing by DEGSON. All rights reserved for patent, copyright and other intellectual property rights. 复制或翻印本文件内容、未经授权不得复制或翻印。本公司保留所有权利。未经许可不得复制或翻印。