





Wiring diagram

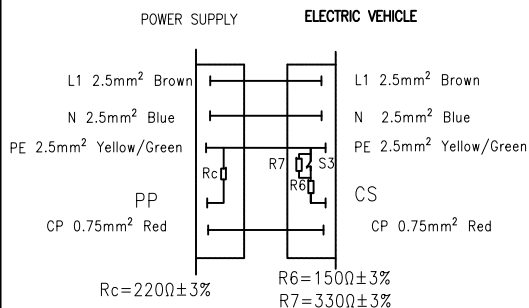

X1 Laser Printing Front Note:  
  
 Laser Printing Back Note (Arial):  
 MEAC-S-016A-P1-03-5.0M-30AH  
 16A 250V AC  
 IEC 62196-2:2016  
 IP54  
 20xxxxxx-xxxx

X2 Laser Printing Front Note (Arial):  
 MAAC-S-016A-V-03-5.0M-30AH  
 16A 250V AC  
 IEC 62196-2:2016  
 IP54  
 20xxxxxx-xxxx  
 Laser Printing Back Note:

未注公差/General tolerances(mm)											0.1/10 ±2'		
0 ~ ±0.12	>3 ~ ±0.18	>6 ~ ±0.22	>10 ~ ±0.26	>18 ~ ±0.31	>30 ~ ±0.37	>50 ~ ±0.57	>80 ~ ±0.80	>120 ~ ±0.93	>180 ~ ±1.05	>250 ~ ±1.15		>315 ~ ±1.60	>400 ~ ±2.20

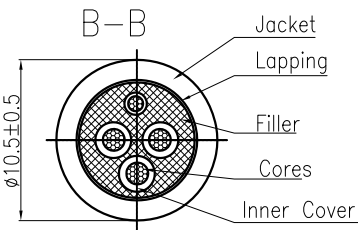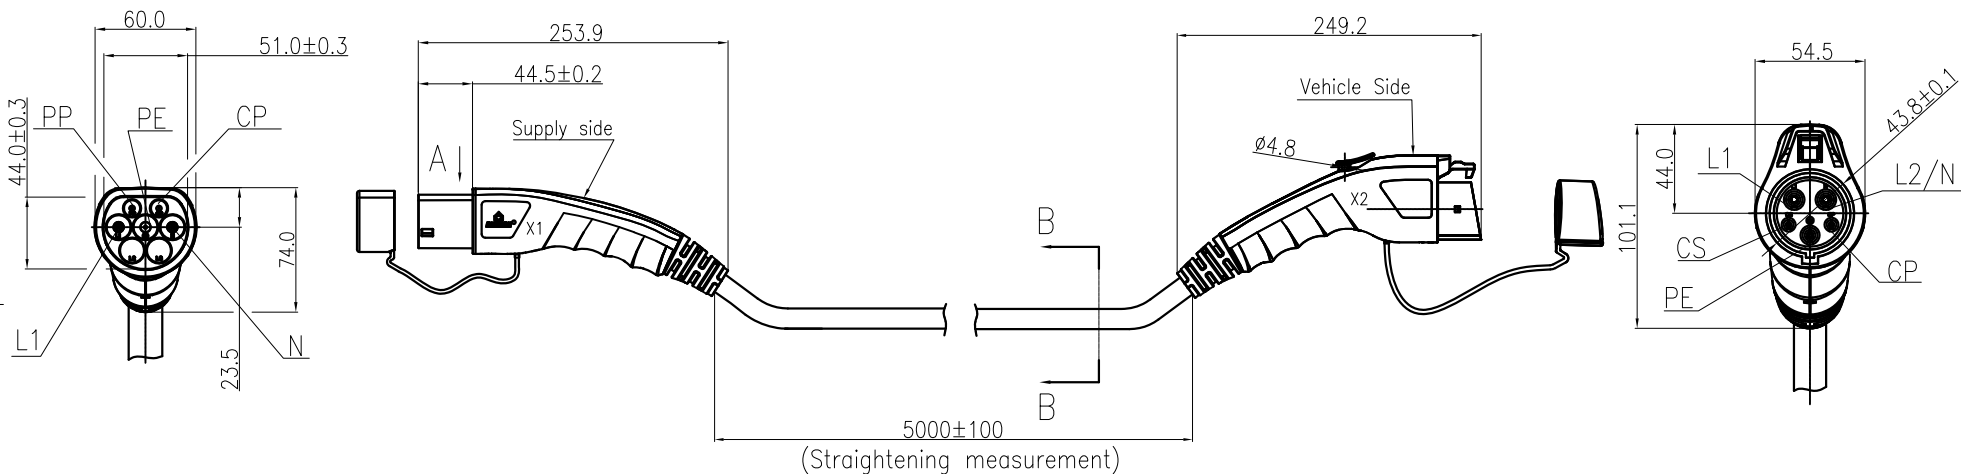

额定电压电流/Rated Voltage/Current	250V AC/16A
绝缘电阻/Insulate Resistance	>100MΩ,500V DC 1min
耐压/Withstanding Voltage	L、N and PE ,2500V AC 1min L and N ,2500V AC 1min
防护等级/Ingress Protection	IP54
插拔寿命/Insertion/Pullout Times	10,000 Times
插拔力/Insertion/Pullout Force	<100N
使用温度范围/Operating temperature(°C)	-30~+50
线材规格/Cable specification	3*2.5mm²+1*0.75mm² Black
标准/Reference standard	IEC 62196-2:2016
符合RoHS环保要求/Conform to RoHS	Yes

		MATERIAL:	SURFACE/COLOR:		
MAT NO./REV: DO-1		MAT STATUS:			
APPD: Ye DB	2024.09.29	NAME MHAC-S-016A-VP1-03-5.0M-30A(H)			
CHKD: Dong RT	2024.09.29	DRAWING NO.			
DRFT: Hu MY	2024.09.29	TYPE	DRAWING STATUS	SCALE	SHEET
A4		CUSTOMER DRAWING		1:3	1/1

REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or common position of its contents are prohibited unless authorized in writing. All rights reserved for patent, design, model or design registrations. 复制、翻印、交流本文件内容、使用本文件内容、未经授权均属侵权。本公司保留所有权利。