

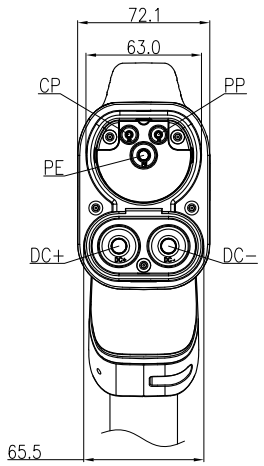
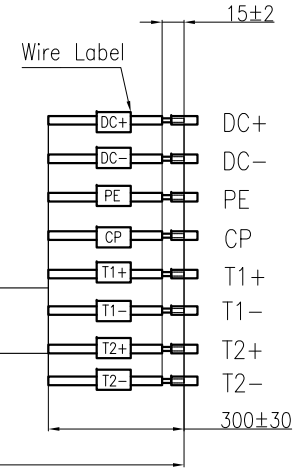


未注公差/General tolerances(mm)										0.1/10 ±2'				
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250		>250 ~ 315	>315 ~ 400	>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.47	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

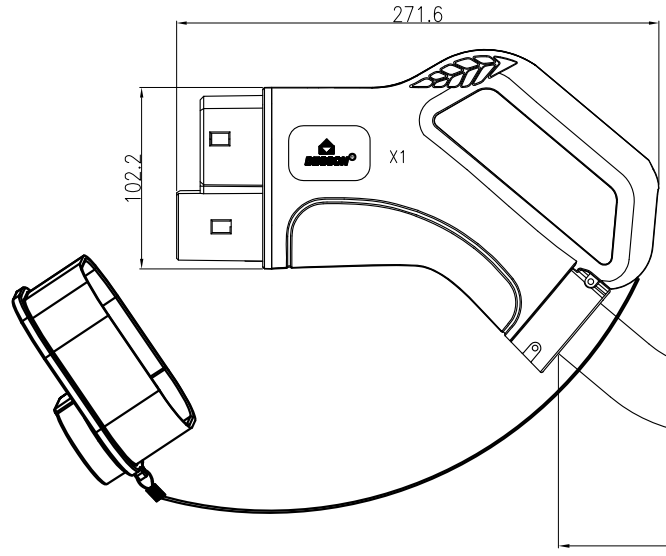

Wiring diagram

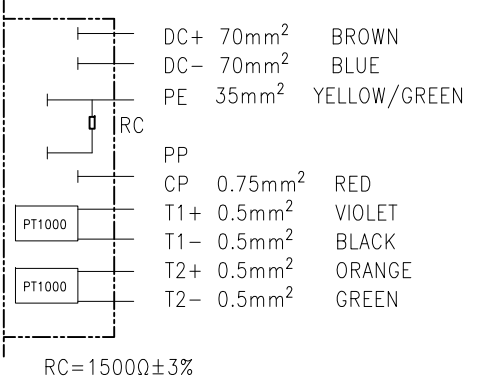


(Straighten measurement)

X1 Laser Printing Front Note:

Laser Printing Back Note(Arial) :
 MEDC-T-200A-V-03-5.0M-30AH
 200A 1000V DC
 IEC 62196-3:2022
 IP54
 20xxxxxx-xxxx

CE

额定电压/Rated voltage	1000V DC;200A
额定电流/Rated current	200A
绝缘电阻/Insulation resistance	>500MΩ,1000V DC 1min
耐压/Withstanding voltage	DC+, DC- and PE, 3500V AC 1min
	DC+ and DC- 3500V AC 1min PP and CP 1500V AC 1min
防护等级/Ingress protection	IP54
插拔寿命/Insertion/Pullout times	10,000 Times
插拔力/Insertion/Pullout force	<100N
使用温度范围/Operating temperature(°C)	-30°C~+50°C
线材规格/Cable specification	2*70mm ² +1*35mm ² +P(2*0.75) +4*0.5 Black
标准/Reference standard	IEC 62196-3:2022
符合RoHS环保要求/Conform to RoHS	Yes



REV	ECN	DESCRIPTION	DRFT	DATE
00-3		Update the drawing	Hu MY	2024.09.13
00-2		Update the drawing	Hu MY	2023.09.21

NO.	DESCRIPTION	MATERIAL NO.	QTY	MATERIAL	NOTES
		MATERIAL:	SURFACE/COLOR:		
APPD: Ye DB 2024.09.13		MAT NO/REV: D0-3	MAT STATUS:		
CHKD: Dong RT 2024.09.13		NAME MEDC-T-200A-V-03-5.0M-30A(H)			
DRFT: Hu MY 2024.09.13		DRAWING NO.	TYPE	DRAWING STATUS	SCALE
			CUSTOMER DRAWING		1:3
					SHEET 1/1

Transfer or duplication of this document as well as the utilization or common position of its contents are prohibited unless authorized in writing by DEGSON. All rights reserved for patent, copyright, trademark, or other intellectual property rights. 复制或翻印本文件内容、未经许可擅自使用、复制或翻印本文件内容、侵害他人合法权益的，本公司保留追究法律责任。 未经授权擅自复制或翻印本文件内容，本公司保留追究法律责任。