Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。本公司保留对专利、实用新型和外观专利的所有权利。

未注公差/General tolerances(mm)														
0~3	>3~6	>6~10	>10~18	>18~30	>30~50	>50~80	>80~120	>120~180	>180~250	>250~315	>315~400	>400~500	>500	0.05/10
±0.08	±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±1°

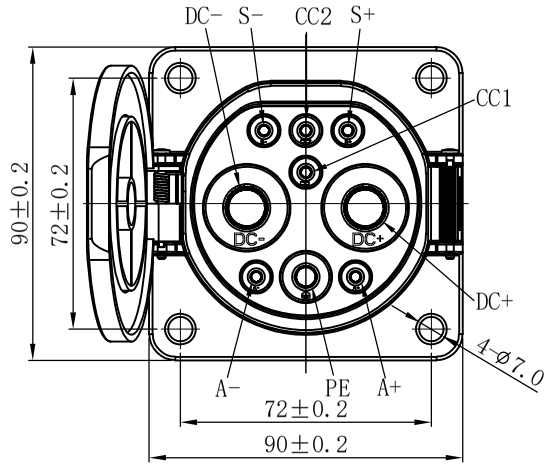

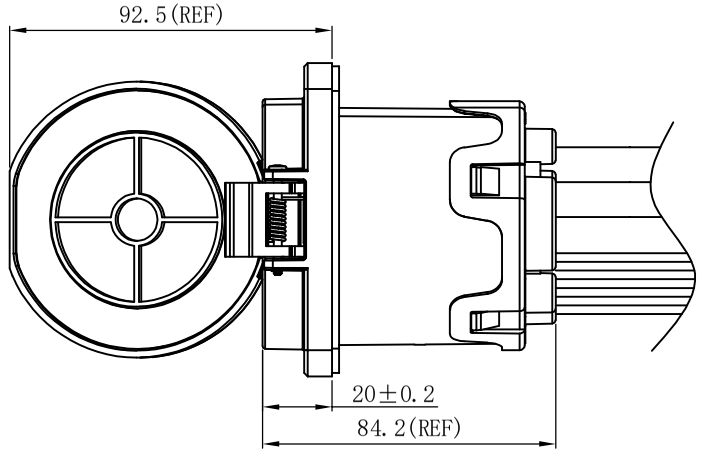

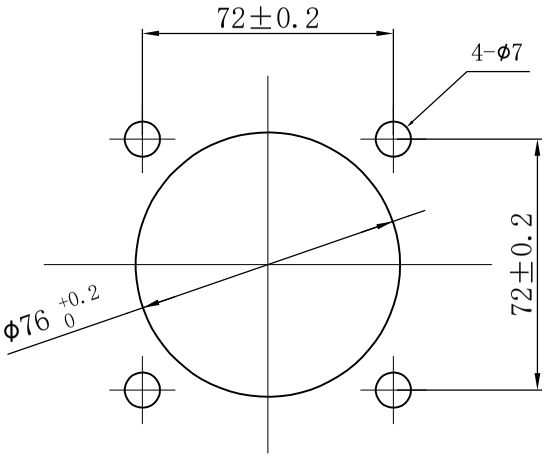

安装孔尺寸

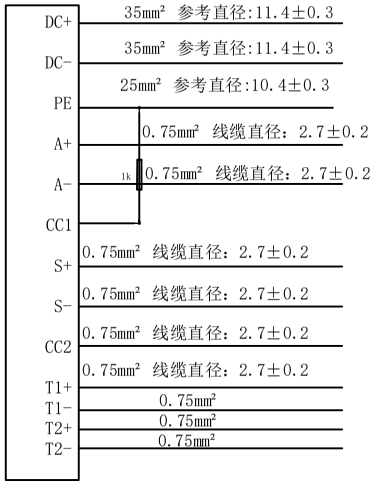

技术要求：

1、执行标准：GB/T20234.1-2015 、GB/T20234.3-2015；
2、额定电压：750V/1000V DC；额定电流125A；
3、绝缘电阻：＞100MΩ；耐电压：DC+,DC-与PE之间>3500V AC，
DC+,DC-之间 >3500V AC,漏电流≤10mA；
4、防护等级：IP55（插合状态）；
插拔寿命：10000次（空载）；
5、阻燃等级：UL94-V0。
6、温升:＜50K;
7、插拔力：＜140N;
8、环境温度：-30℃～50℃;
9、热敏电阻PT1000分别置于DC+/-旁边，当温度0℃时电阻1000±2Ω，
当温度100℃时，阻值为1375±2Ω，阻值随温度增大而增大(根据客户要求可更换为NTC10K)；
10、螺钉组件散件配套发货.

00	/	初版发行	冉从平	22.03.15	DRFT: 冉从平	22.03.15		
REV	ECN	DESCRIPTION	DRFT	DATE	A4	(inch)		

DEGSON

MATERIAL: /		SURFACE/COLOR: 表面处理	
MAT NO./REV: 22060000063		MAT STATUS: 物料状态	
APPD: 核准人	NAME	FGDC-T-125A-V-03-0.0M-50A(H)	
CHKD: 审核人			

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
图号	图纸类型	图纸状态	2:1	1/1