

Contacts, silver-plated

 $(\varnothing A)$

Wire gauge

Recommended
stripping length

Type of products

 (mm^2)

(AWG)

DK-70A-SF-10-镀银

4.3

10

8

12mm

DK-70A-SF-16-镀银




5.5

16

6

12mm

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵权者将承担赔偿责任。侵权保留对涉及发明、实用新型和外观设计的所有权利。

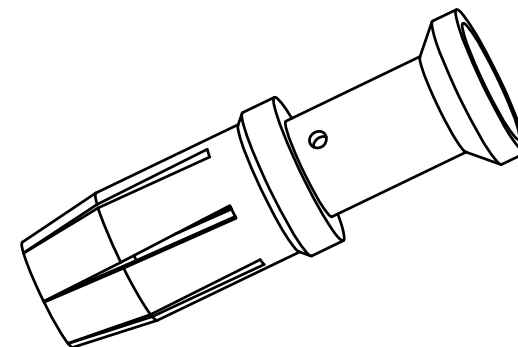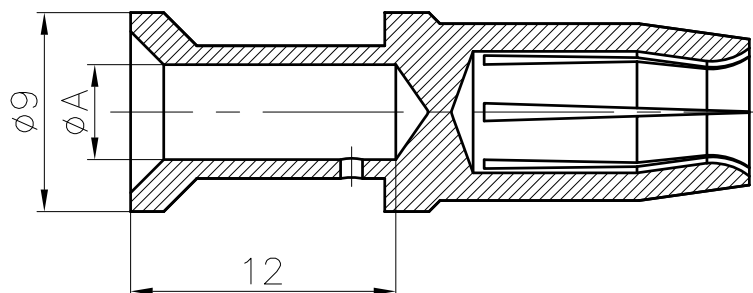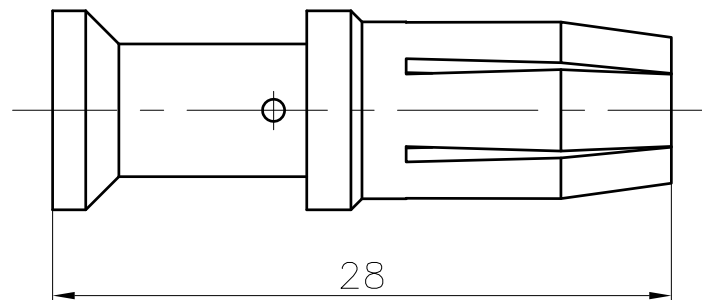

Crimp contacts

01. Material :Copper alloy

02. Surface :silver plated

03. Contact resistance : $\leq 1\text{m}\Omega$

04. Terminal :Crimp connection

05. Wire gauge : $10\text{mm}^2/16\text{mm}^2$ (8AWG/6AWG)

06. Rohs Compliance

07. General tolerances: DIN ISO 2768-m

		MATERIAL: /	SURFACE/COLOR: /		
		MAT NO./REV: D0	MAT STATUS: /		
APPD: Song ZG 2023.07.31	NAME: DK-70A-SF-xx-镀银				
CHKD: Yang SH 2023.07.31					
DRFT: Zhou YZ 2023.07.31	DRAWING NO. /	TYPE: CUSTOMER DRAWING	DRAWING STATUS: /	SCALE: 1:1	SHEET: 1/1
A4					

REV	ECN	DESCRIPTION	DRFT	DATE