
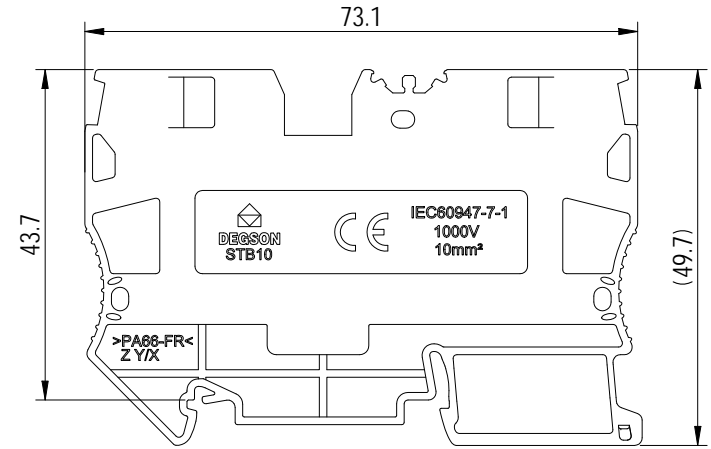
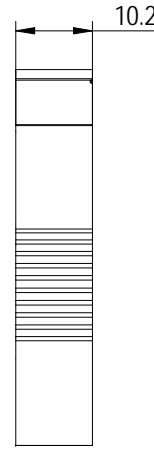
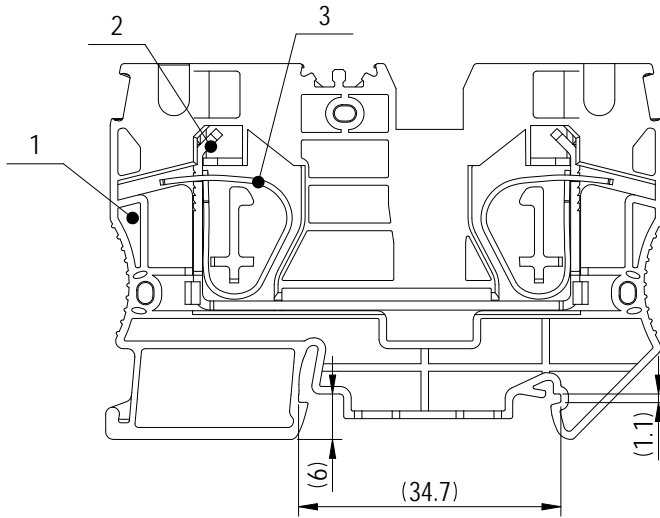


未注公差/General tolerances (mm)												0.1/10		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400		>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

Screwdriver hole: 1x5.5 screwdriver is recommended



UL 标准/UL Standard:	B	C	D
额定电压/电流/R ated Voltage(V)/Current(A)	600/65	600/65	/
IEC 标准/IEC Standard:			
过压类别/O verv voltage Category /污染等级/Pollution D	III/3	III/2	II/2
额定电压/电流/R ated Voltage(V)/Current(A)	1000/57	/	/
额定脉冲电压(KV)/R ate Impulse Voltage(KV)	8	/	/
线径范围(硬线和软线)/W ire Range(rigid and flexible)(AW G/m m²)	0.2~1.0, 16(sol) / 24~8.6(sol)		
间距/P itch(m m)/线数范围/P oles	10.2/N =01P		
剥线长度/Stripping length(mm)	18		
使用温度范围/O perating temperature(°C)	-60~+105		
符合RoHS环保要求/C onform to RoHS	Yes		

ITEM	NAME OF PART	MATERIAL	NOTES
3	Spring	Stainless	/
2	Current Carrier	Copper Alloy	Sn Plated
1	Housing	PA66	UL94 V-0



MATERIAL:	SURFACE/COLOR:
MAT NO./REV: 1110000027-1 / 00	MAT STATUS: 设计放行

APPD: PENG M 2024.07.30	NAME	STB10-01P-11-00Z(H)
CHKD: LU JK 2024.07.30		
DRFT: YE XD 2024.07.24		

REV	ECN	DESCRIPTION	DRFT	DATE	SCALE	SHEET
00				2024.07.24	1:1	1/1

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密和与经营活动有关的知识产权外，其他知识产权均归本公司所有。