
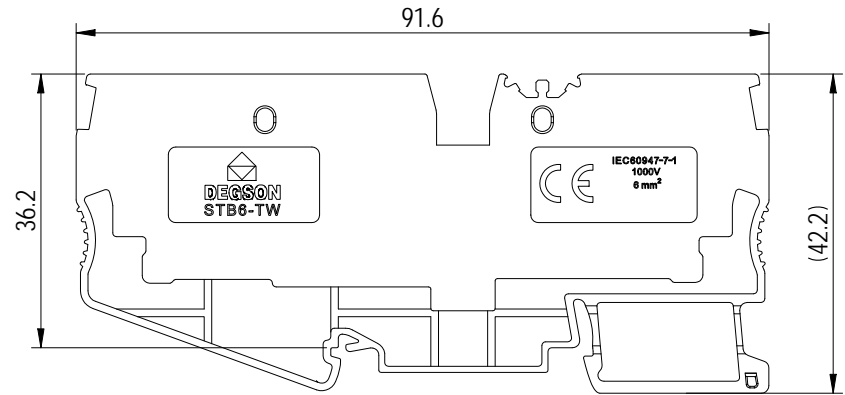
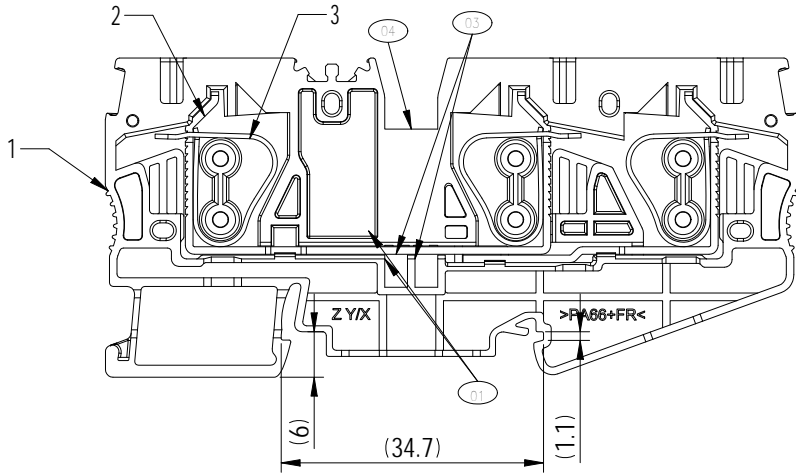


Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing. All rights reserved for patent, utility model or design registrations. 除专利号明确标注外, 其他禁止转让、复制、引用。凡未经许可擅自复制或传播, 一经发现, 必究。本公司保留对涉及发明、实用新型和外观设计专利的所有权利。

Screwdriver hole: 0.8x4.0 screwdriver is recommended



未注公差/General tolerances (mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage (V)/Current (A)	600/30	600/30	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollut	III/3	III/2	II/2
额定电压/电流/Rated Voltage (V)/Current (A)	1000/41	/	/
额定脉冲电压 (KV)/Rate Impulse Voltage (KV)	8	/	/
线径范围(硬线和软线)/Wire Range (rigid and flexible) (AWG/mm²)	0.2~6, 10 (so1) / 24~10, 8 (so1)		
间距/Pitch (mm)/线数范围/Poles	8.2/N=01P		
剥线长度/Stripping length (mm)	11~13		
使用温度范围/Operating temperature (°C)	-60~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

3	Spring	Stainless	/
2	Current Carrier	Copper Alloy	Sn Plated
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DEGSON		MATERIAL:	SURFACE/COLOR:	
APPD: PENG M	2024.06.28	MAT NO./REV: 11030000822-1/01.02	MAT STATUS: 设计放行	
CHKD: GAO WG	2024.06.28	NAME		
DRFT: LIU Y	2024.06.28	STB6-TW-01P-11-00A&Z (H)		
④	A4	DRAWING NO. 200142520	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布
			SCALE 2:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
04	ECN	Change bridge, update housing structure.	LIU Y	2024.06.28