
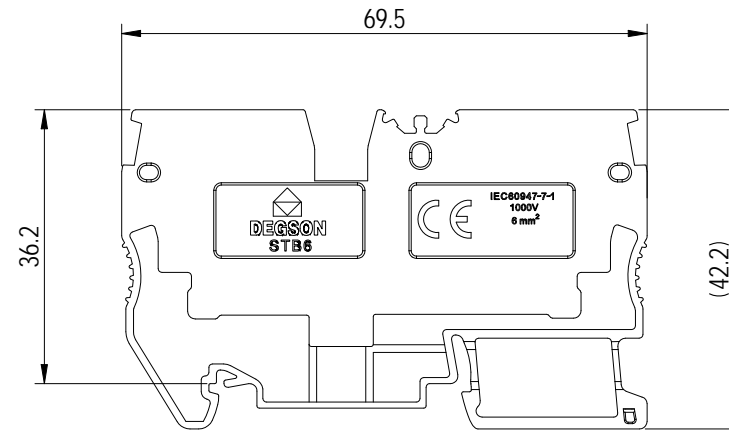



未注公差/General tolerances (mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage (V)/Current (A)	600/30	600/30	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollut	III/3	III/2	II/2
额定电压/电流/Rated Voltage (V)/Current (A)	1000/41	/	/
额定脉冲电压 (KV)/Rate Impulse Voltage (KV)	8	/	/
线径范围 (硬线和软线)/Wire Range (rigid and flexible) (AWG/mm <sup>2</sup> )	0.2~6, 10(sol) / 24~10, 8(sol)		
间距/Pitch (mm)/线数范围/Poles	8.2/N=01P		
剥线长度/Stripping length (mm)	11~13		
使用温度范围/Operating temperature (°C)	-60~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

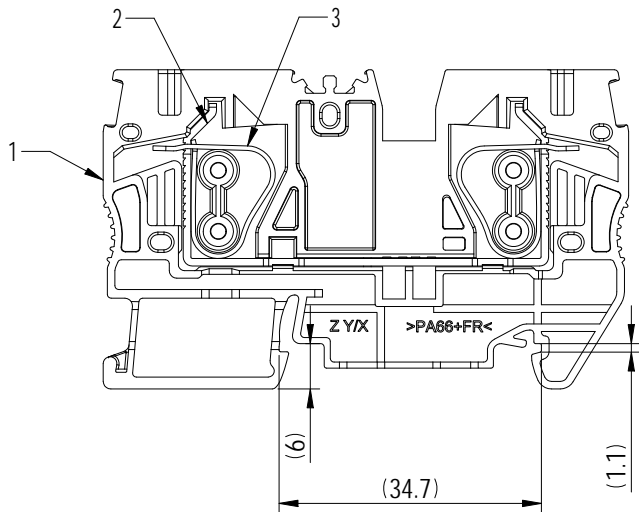

3	Spring	Stainless	/
2	Current Carrier	Copper Alloy	Sn Plated
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL:		SURFACE/COLOR:					
		MAT NO./REV: 11030000833-1 / 01.02		MAT STATUS: 批量					
APPD: PENG M	2024.11.20	NAME							
CHKD: GAO WG	2024.11.19	STB6-01P-11-00A&Z (H)							
DRFT: JIANG WT	2024.11.19								
REV	ECN	DESCRIPTION	DRFT	DATE	DRAWING NO. 200153988	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布	SCALE 2:1	SHEET 1/1

05		The product is concluded and the mass production drawings are released	JIANG WT	2024.11.19
REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing. All rights reserved for patent, utility model or design registrations. 除专利权明确授权外, 否则禁止转让、复制、引用、光刻等文件的存储、使用、传播等行为, 一经发现, 侵权必究。本公司保留对涉及发明、实用新型和外观设计的所有权利。