
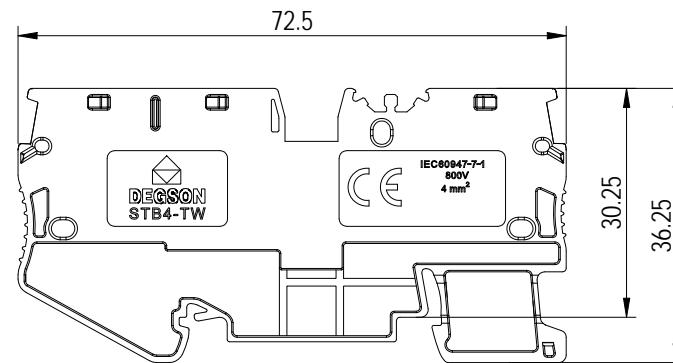
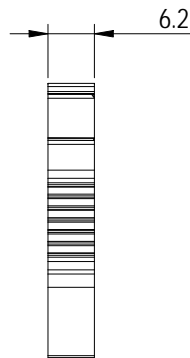


公差/General tolerances (mm)													0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10	±2'
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500			
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50		
UL 标准/UL Standard:											B	C	D		
额定电压/电压/Rated Voltage(V)/Current(A)											600/30	600/30	/		
IEC 标准/IEC Standard:															
过压类别/Over voltage Category/污染等级/Pollution Degree											III/3	III/2	II/2		
额定电压/电压/Rated Voltage(V)/Current(A)											800/32	/	/		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)											8	/	/		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)											0.08~4, 6(sol) / 28~12,10(sol)				
间距/Pitch(mm)/线数范围/Poles											6.2/N=01P				
剥线长度/Stripping length(mm)											8~10				
使用温度范围/Operating temperature(°C)											-60~+105				
符合RoHS环保要求/Conform to RoHS											Yes				

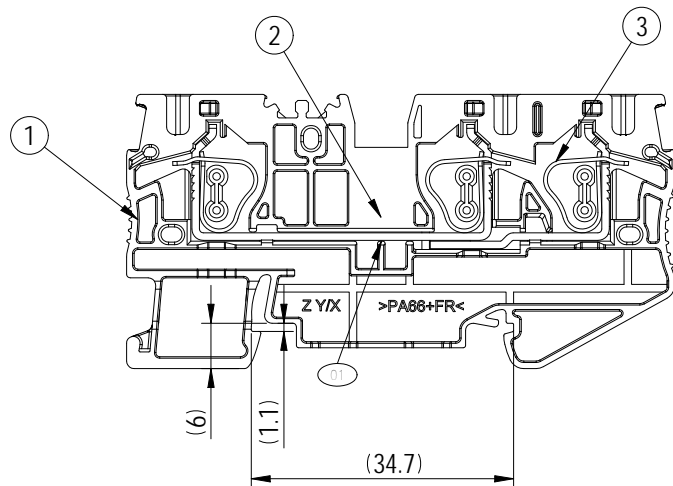

3	Spring	Stainless	/
2	Current Carrier	Copper Alloy	Sn Plated
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL:		SURFACE/COLOR:	
		MAT NO./REV: 1110000020-1 / 01.02		MAT STATUS: 小批量	
APPD: PENG M	2024.04.23	NAME			
CHKD: GAO WG	2024.04.22	STB4-TW-01P-11-00Z (H)			
DRFT: LIU Y	2024.04.22	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
		200268678	CUSTOMER DRAWING	已发布	2:1
					SHEET 1/1

01		Change bridge, update current_carrier and housing structure.	LIU Y	2024.04.22
REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing. All rights reserved for patent. Utility model or design registrations. 除专利申明外, 复制、引用、分发本文件的任何行为, 未经书面许可均属非法。保留所有权利和/或专利的所有权。