
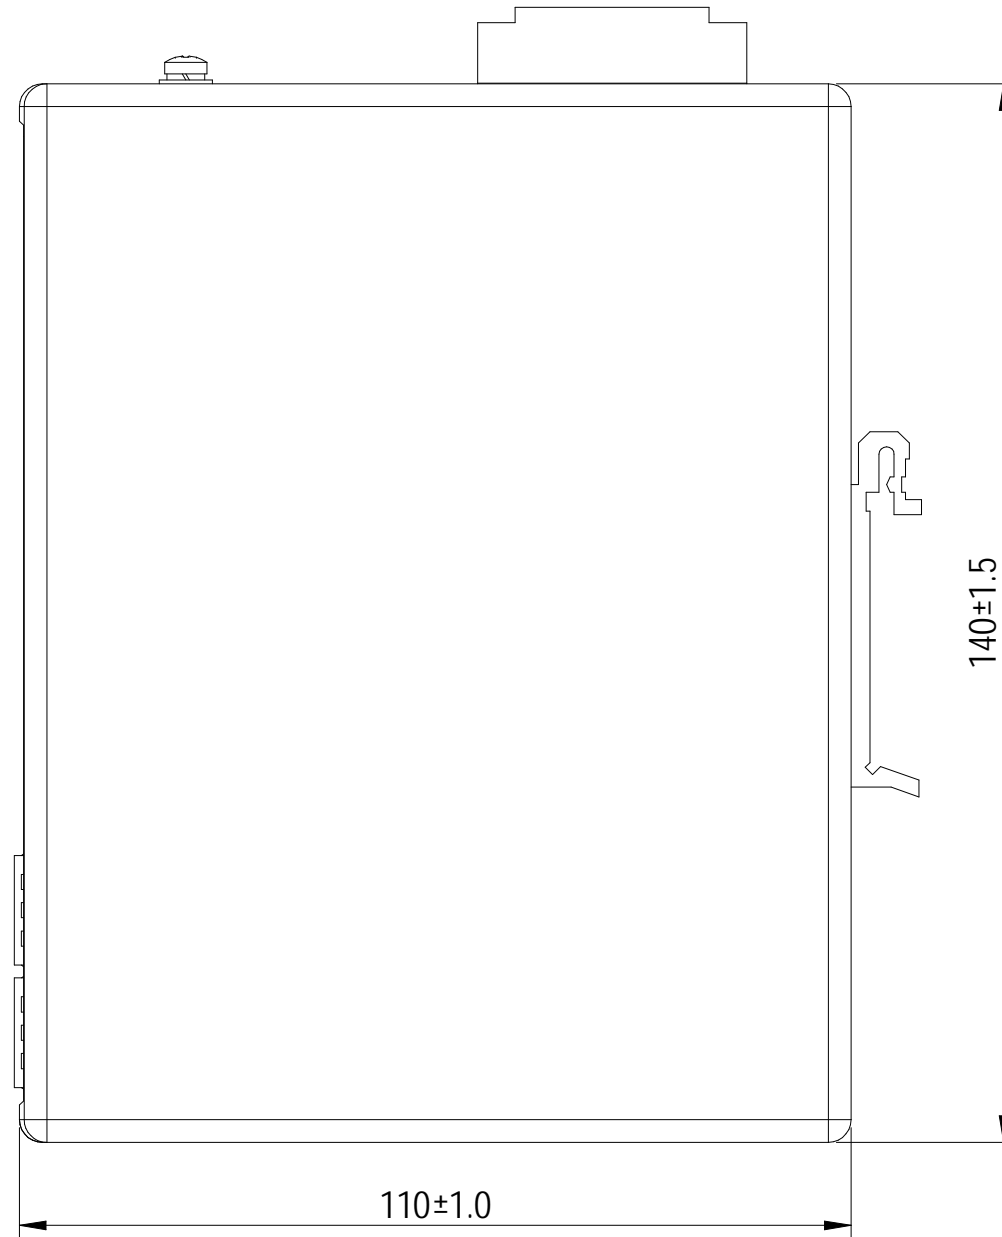
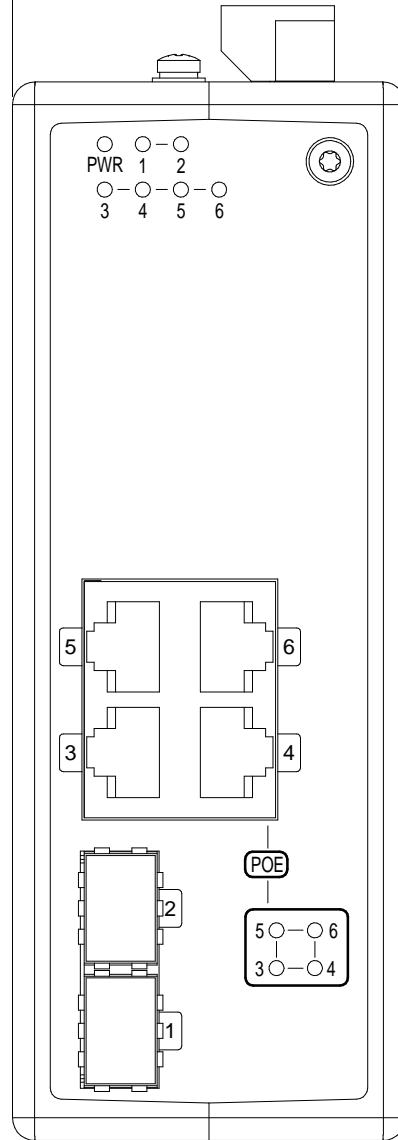
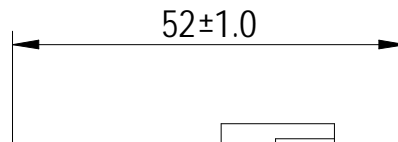




未注公差/General tolerances(mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500		±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

端口数/Pore number	6
防护等级/Protection Degree	IP30
工作温度/Operating temperature	-40~+75℃
电源/Power	48-57 VDC/3.0A (max.)
安装方式Installation mode	DIN35mm

印字为激光打标, 印字内容清晰、无断线等/Printing for laser marking, printing content is clear, no broken line, ect

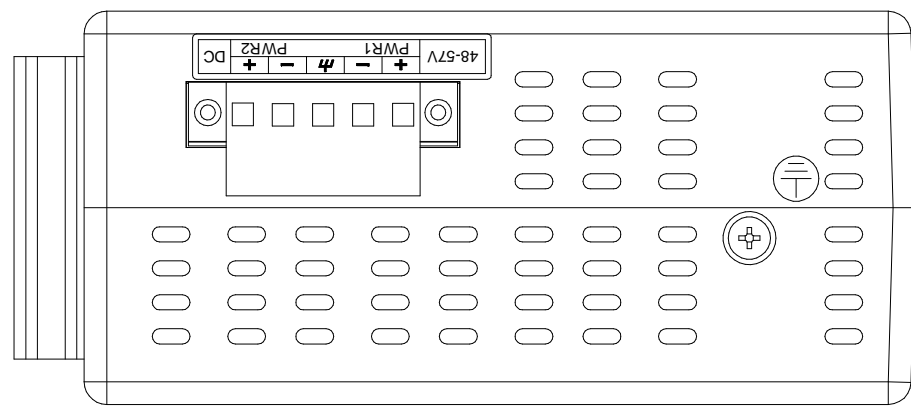

产品序列号  
随产品出厂自动生成:  
Product serial number  
Automatically generated with the product factory;

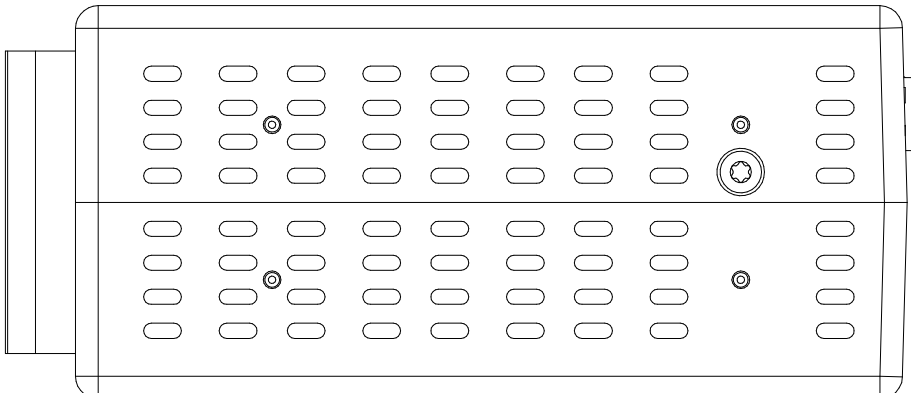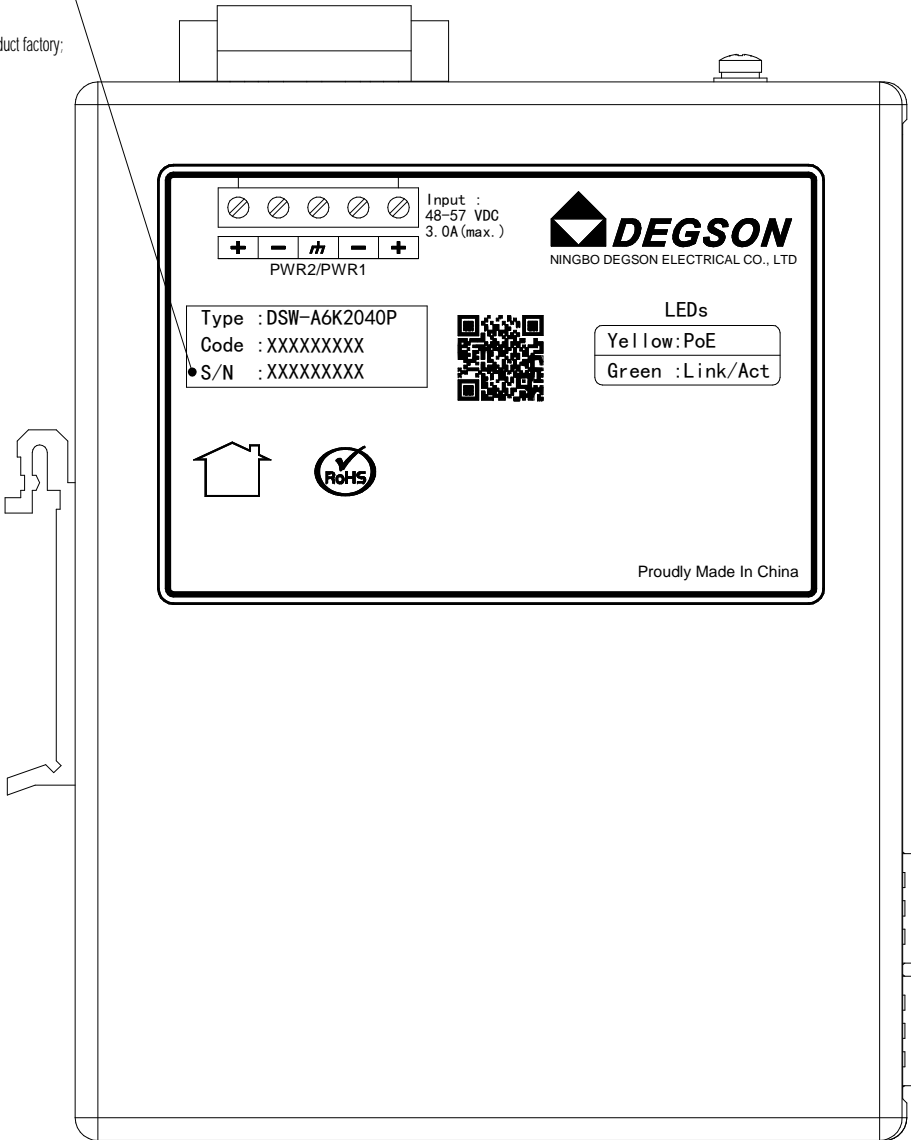

<b>DEGSON</b>		MATERIAL:	SURFACE/COLOR:	
APPD: LGL	2024.09.13	MAT NO./REV: 30090000009-1 / 00	MAT STATUS: 批量	
CHKD: MEK	2024.09.10	NAME: DSW-A6K2040P		
DRAFT: GXJ	2024.09.02	DRAWING NO. 200306577	TYPE: CUSTOMER DRAWING	DRAWING STATUS: 已发布
REV	ECN	DESCRIPTION	DRAFT	DATE
00		Changed: EAC authentication was removed	GXJ	2024.09.02
		SCALE: 1:1		SHEET: 1/1

00		Changed: EAC authentication was removed	GXJ	2024.09.02
REV	ECN	DESCRIPTION	DRAFT	DATE

Transfer or duplication of this document, as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除经本厂书面许可外, 复制或传播本文件内容, 或在本文件内容基础上进行任何修改, 或在本文件内容基础上进行任何复制或传播, 均属于侵权行为, 本公司保留追究法律责任的权利。 未经授权, 禁止复制或传播本文件内容, 违者将依法追究法律责任。 本公司保留追究法律责任的权利。