FOR-I755 Rev.I.7

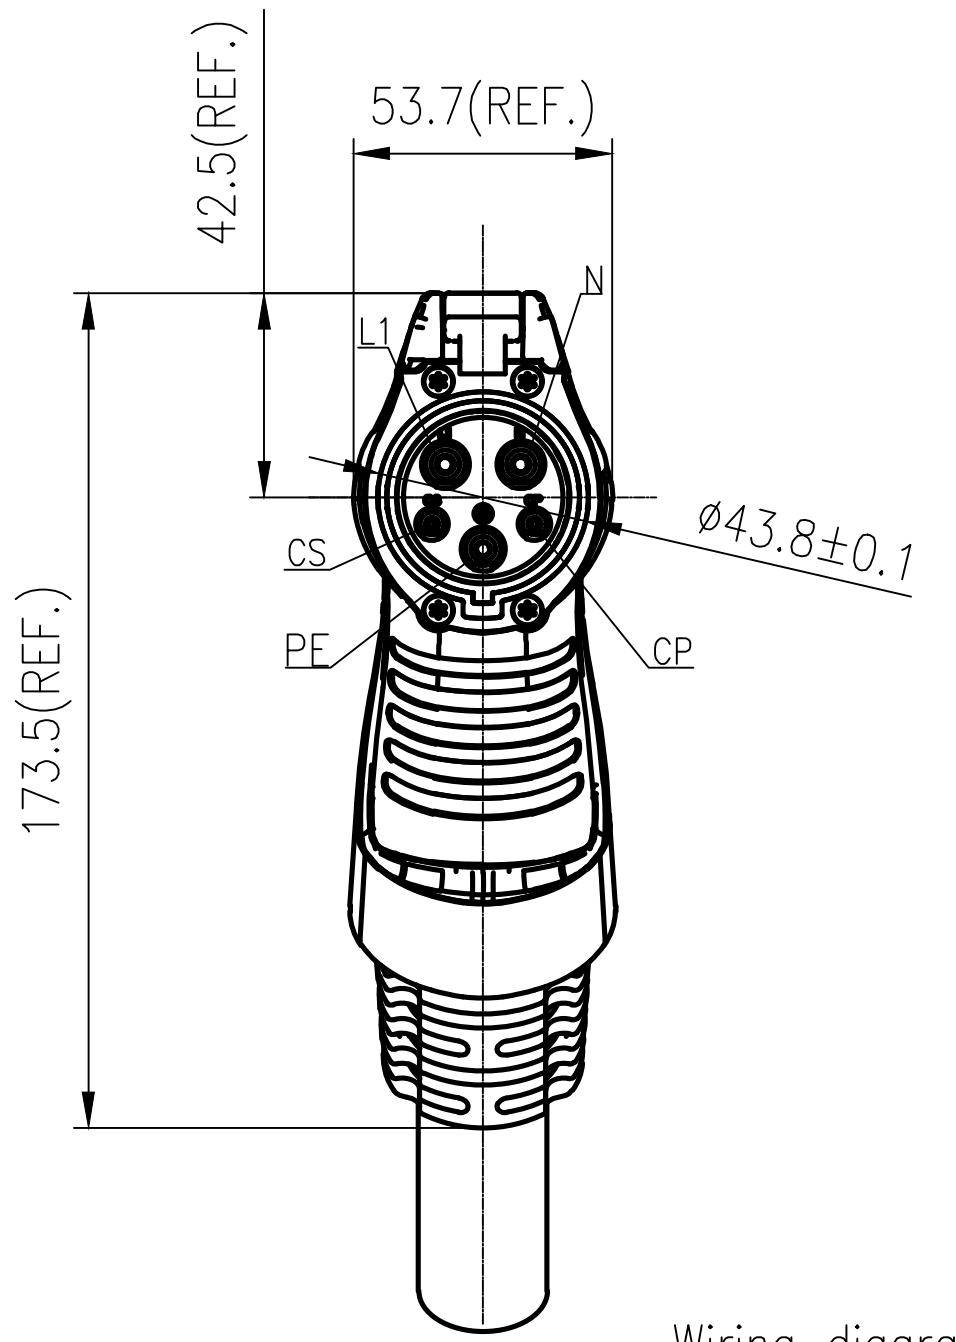

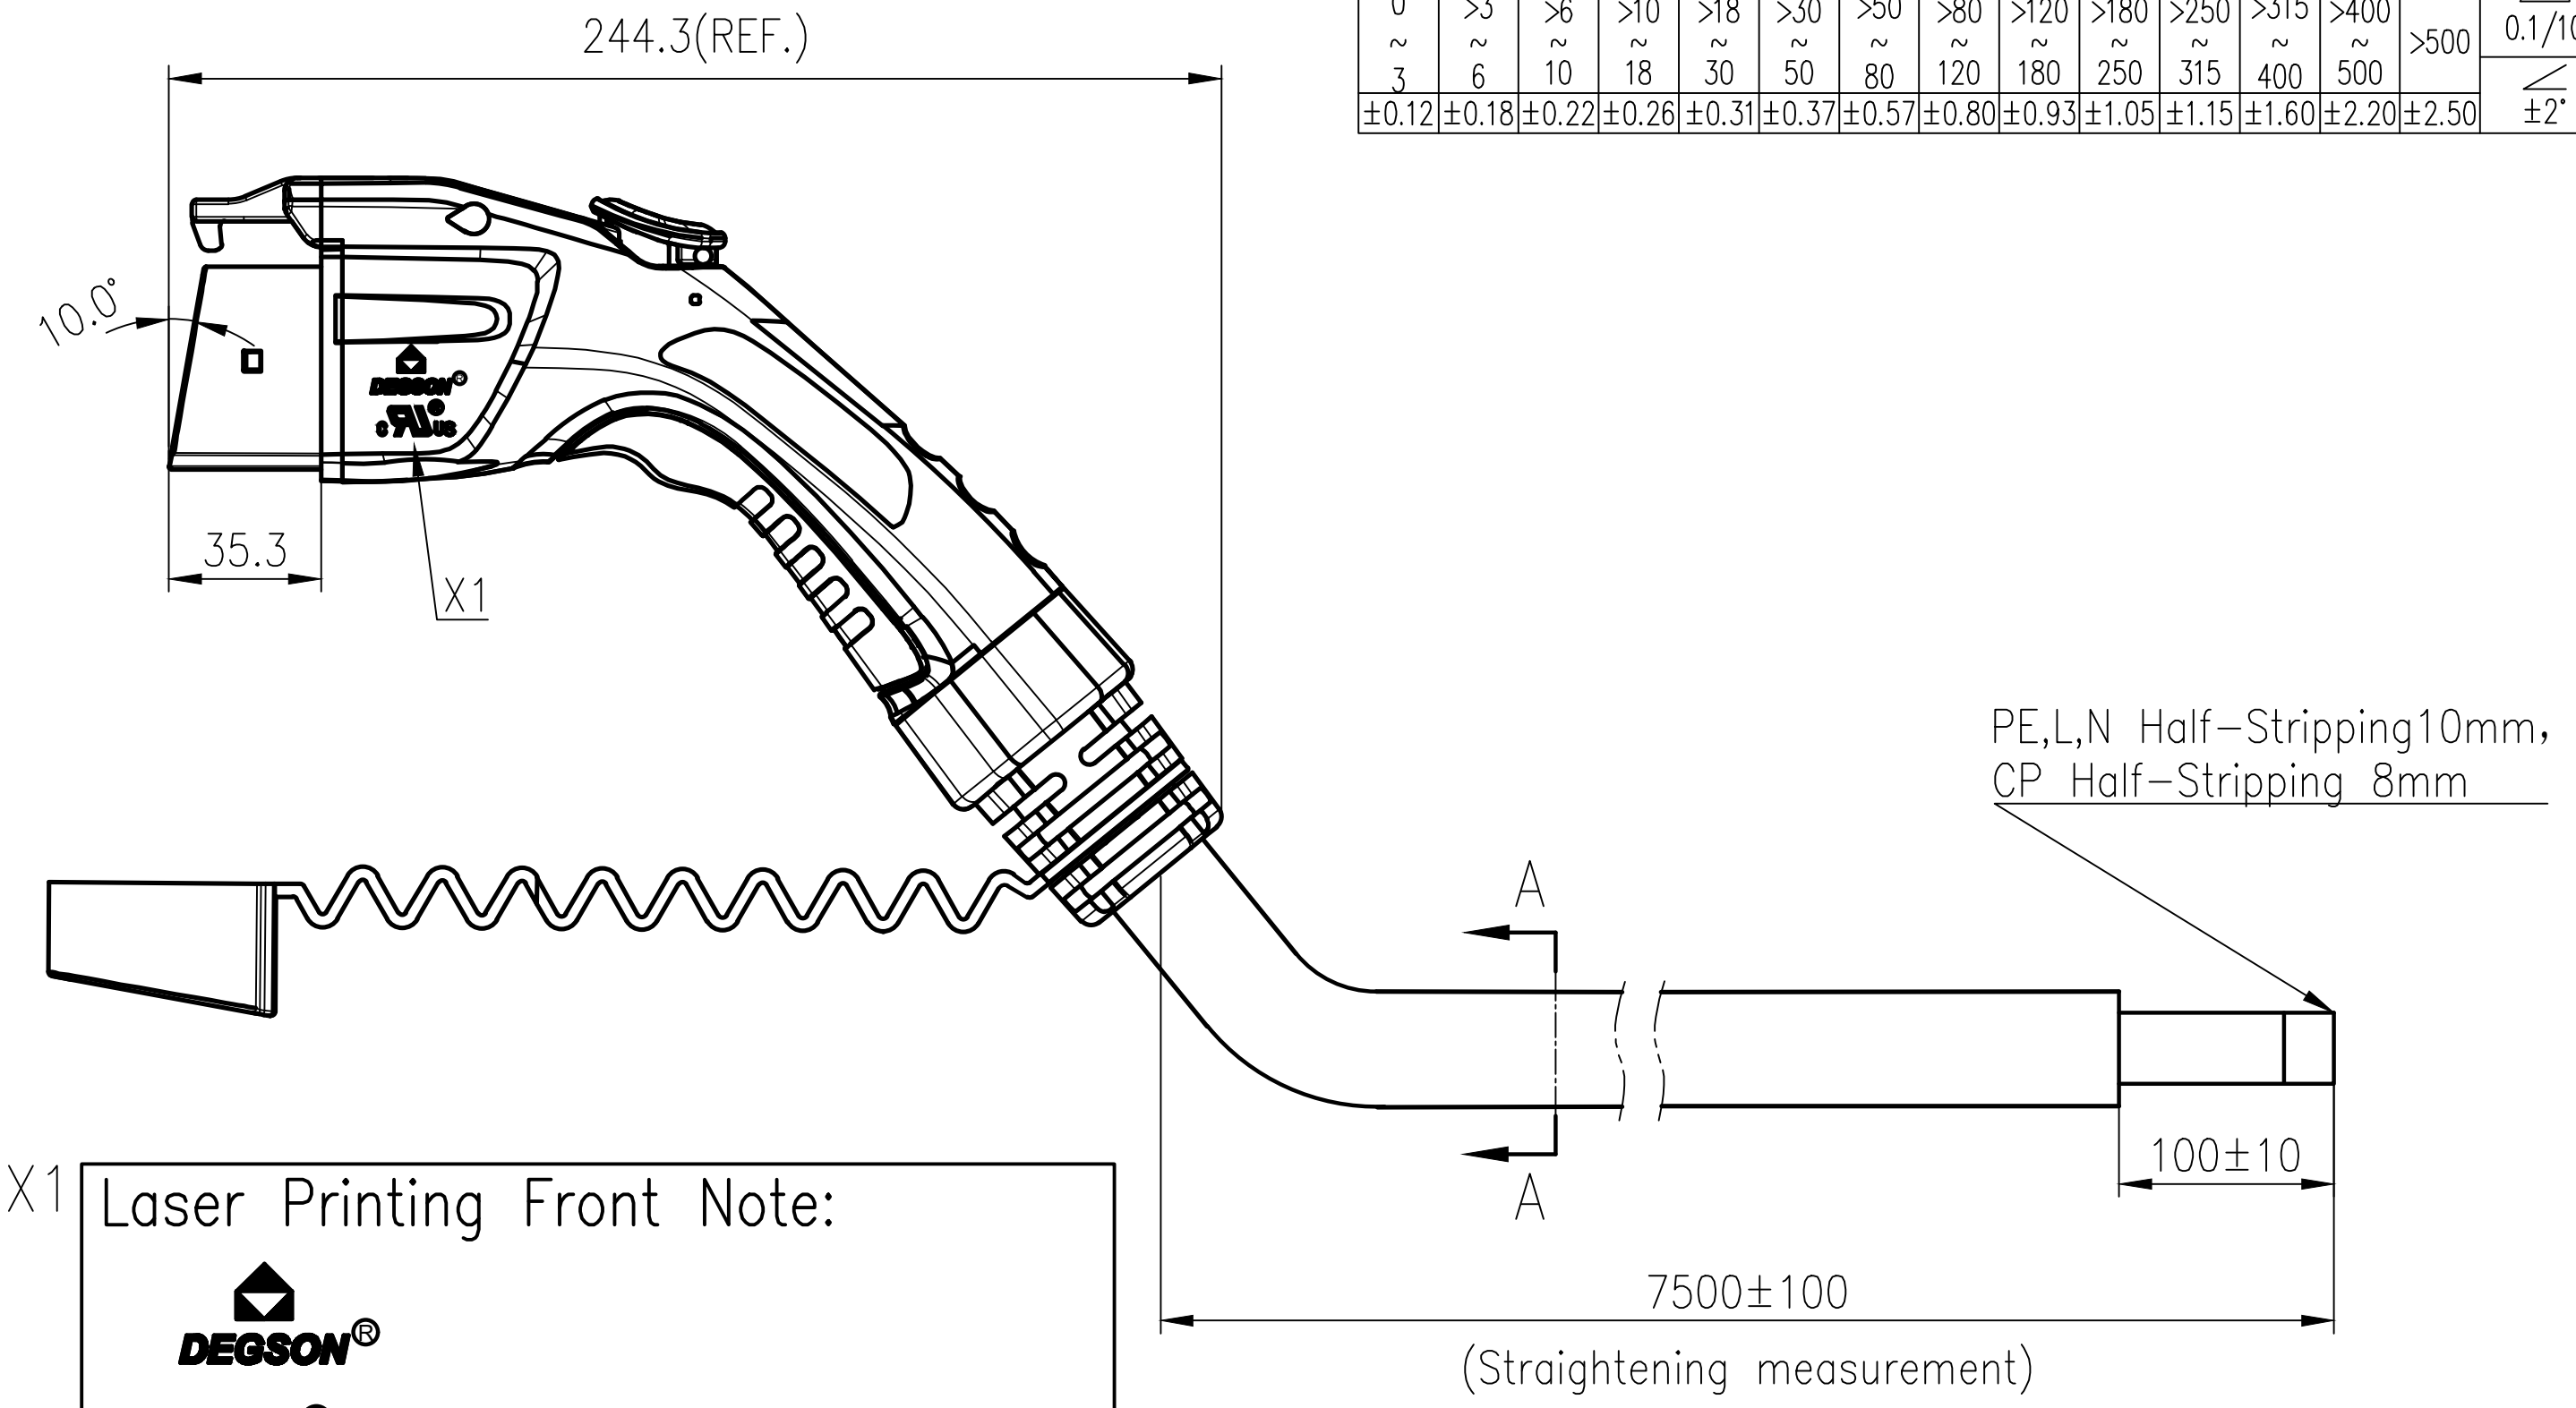

未注公差/General tolerances(mm)															
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

Wiring diagram

L1 6AWG Red
N 6AWG Black
PE 8AWG Green

CP 22AWG Orange



R6=150Ω±3%
R7=330Ω±3%

X1

Laser Printing Front Note:

DEGSON®

c UL us

Laser Printing Back Note(Arial):

MAAC-S-080A-V2-03-7.5M-10AH
80A 250V AC
SAE J1772:2017
TYPE 4
20xxxxxx-xxxx
CAUTION-Do not use this product
if any damage
ATTENTION - n'utilisez pas ce
produit s'il y a des dommages

A-A

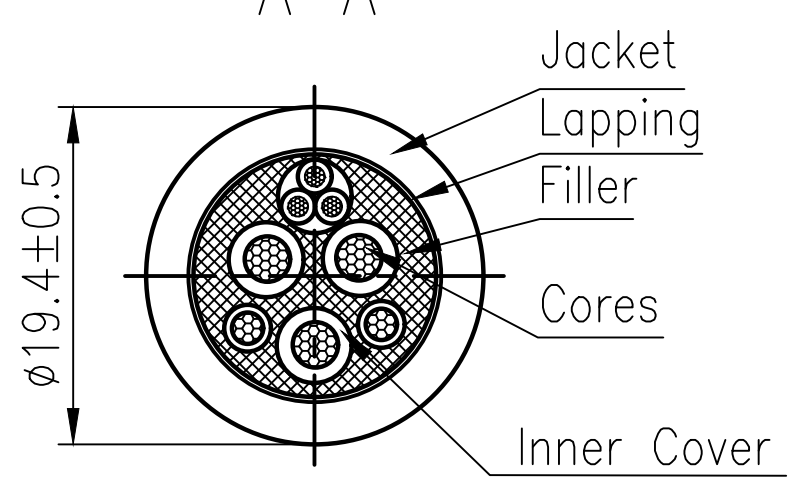

额定电压电流/Rated Voltage/Current	250V AC/80A
绝缘电阻/Insulate Resistance	>100MΩ,500V DC 1min
耐压/Withstanding Voltage	L、N and PE ,2500V AC 1min L and N ,2500V AC 1min
防护等级/Ingress Protection	TYPE 4
插拔寿命/Insertion/Pullout Times	10,000 Times
插拔力/Insertion/Pullout Force	<75N
使用温度范围/Operating temperature(℃)	-30~+50
线材规格/Cable specification	2*6AWG+1*8AWG+2*22AWG+3*22AWG Black
标准/Reference standard	SAE J1772:2017
符合RoHS环保要求/Conform to RoHS	Yes

DEGSON	MATERIAL:		SURFACE/COLOR:	
	MAT NO./REV:	/	MAT STATUS:	
APPD: Ye DB 2024.9.18	NAME	MAAC-S-080A-V2-03-7.5M-10A(H)		
CHKD: Dong RT 2024.9.18				
DRFT: ZhouC 2024.08.13	DRAWING NO.	TYPE: CUSTOMER DRAWING	DRAWING STATUS	SCALE 1:3 / SHEET 1/1
A4 mm (inch)				

REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations.