FOR-1759 Rev.1.7

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations.

未注公差/General tolerances(mm)														
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/20	600/20	600/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	500/24	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	26~ 12/ 0.2~ 2.5&4(SOL)		
间距/Pitch(mm)/线数范围/Poles	5.20/01P		
剥线长度/Stripping length(mm)	10~ 12		
使用温度范围/Operating temperature(°C)	-40~ + 105		
符合RoHS环保要求/Conform to RoHS	Yes		

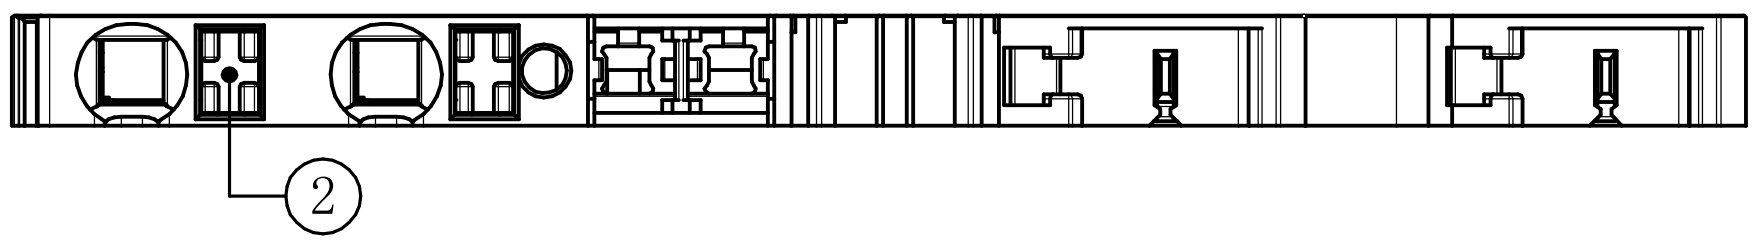

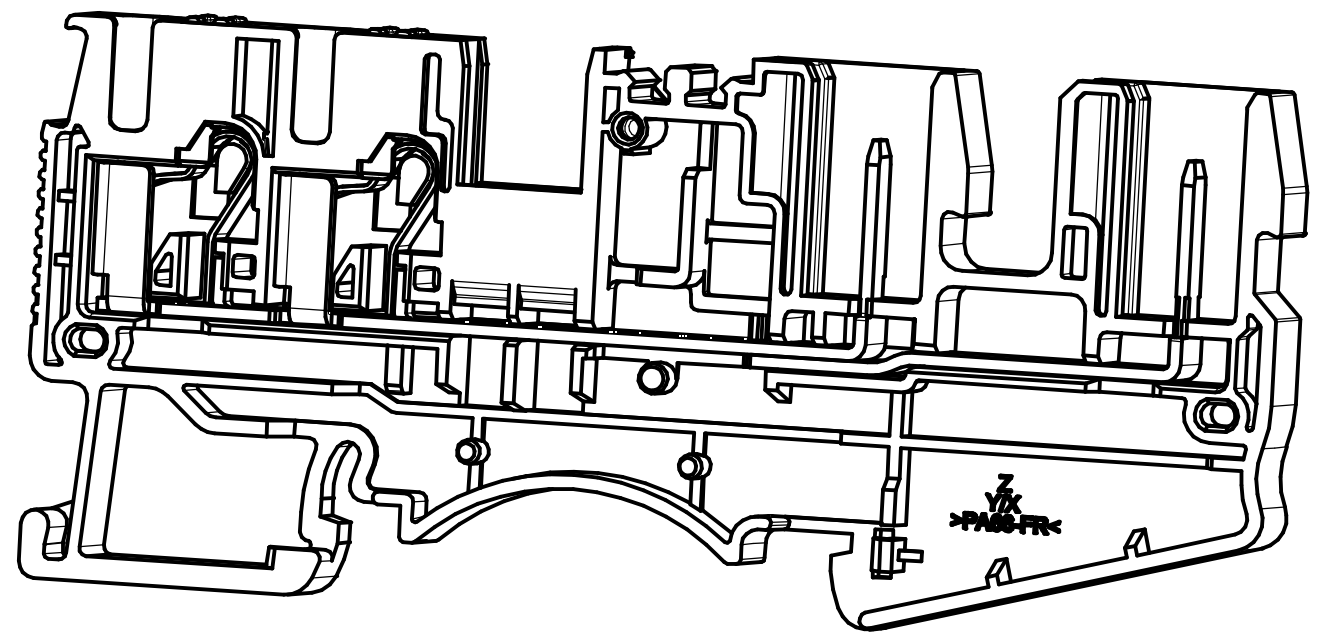

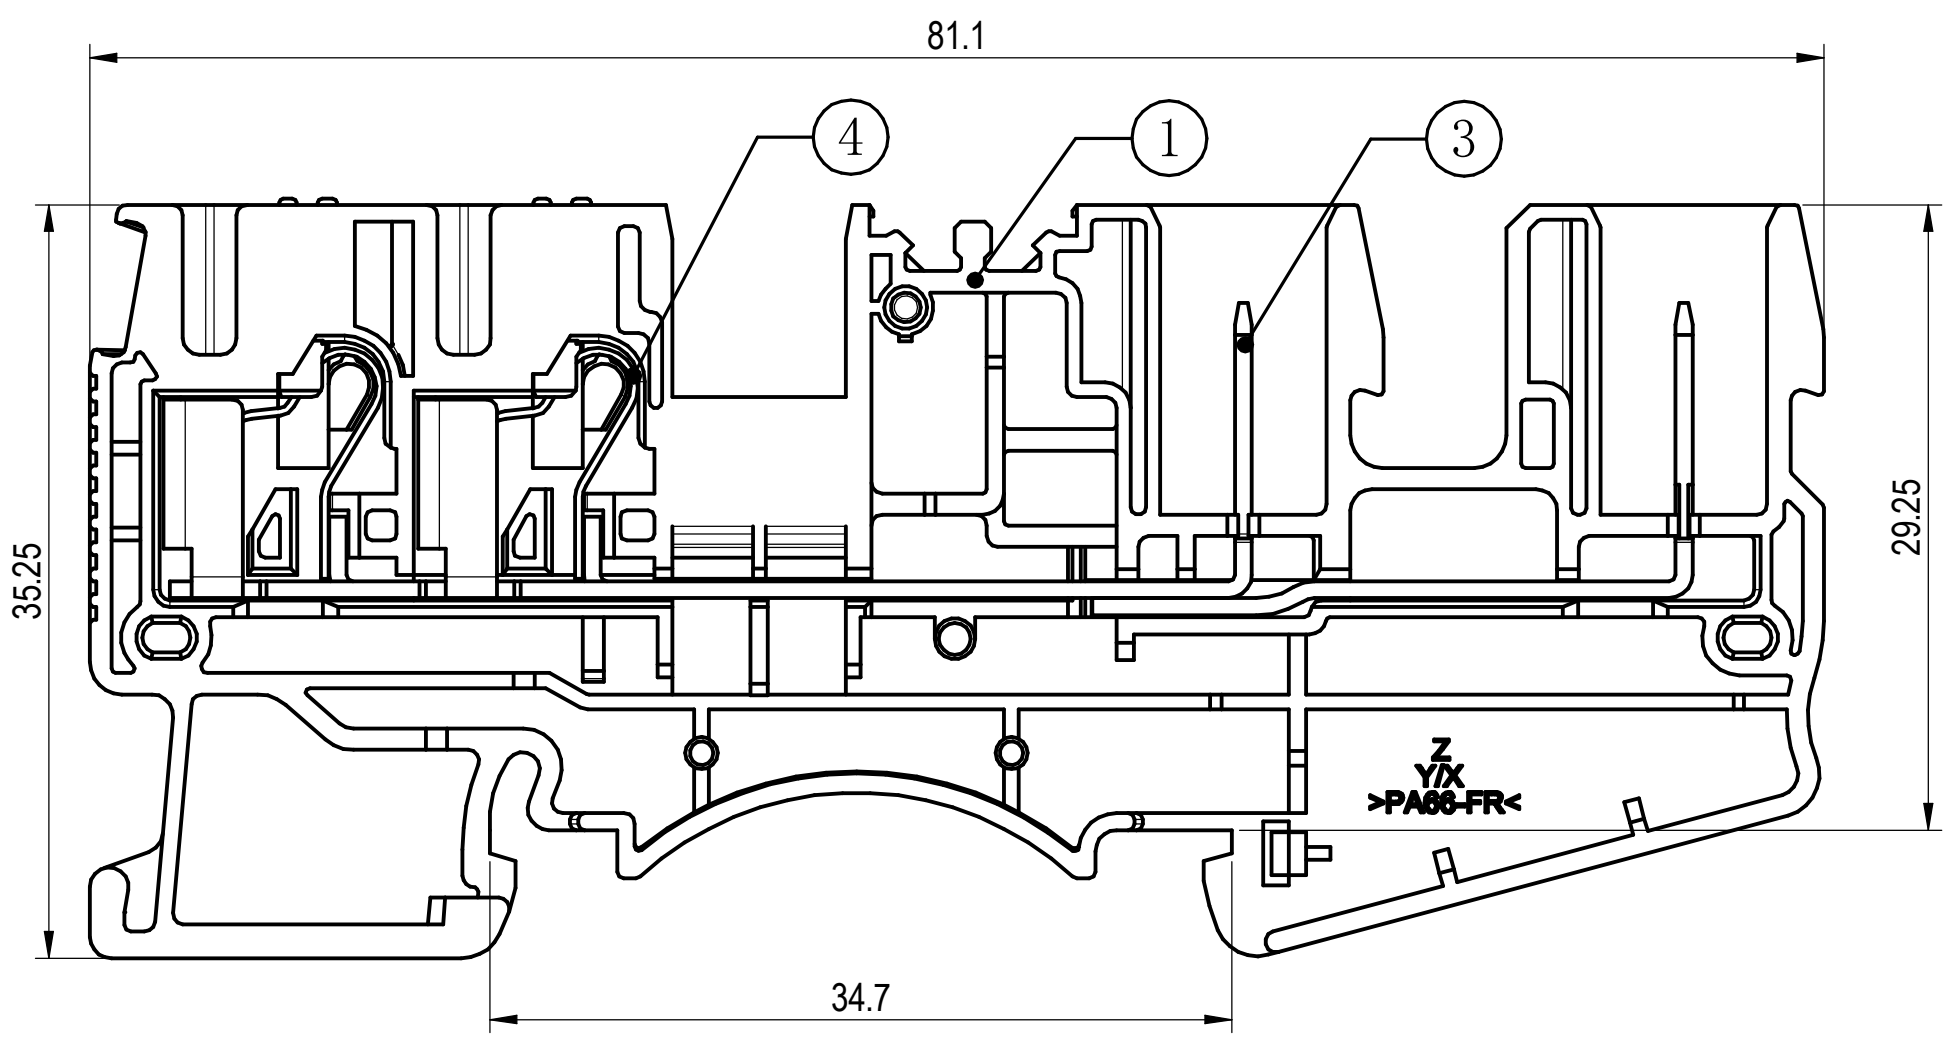



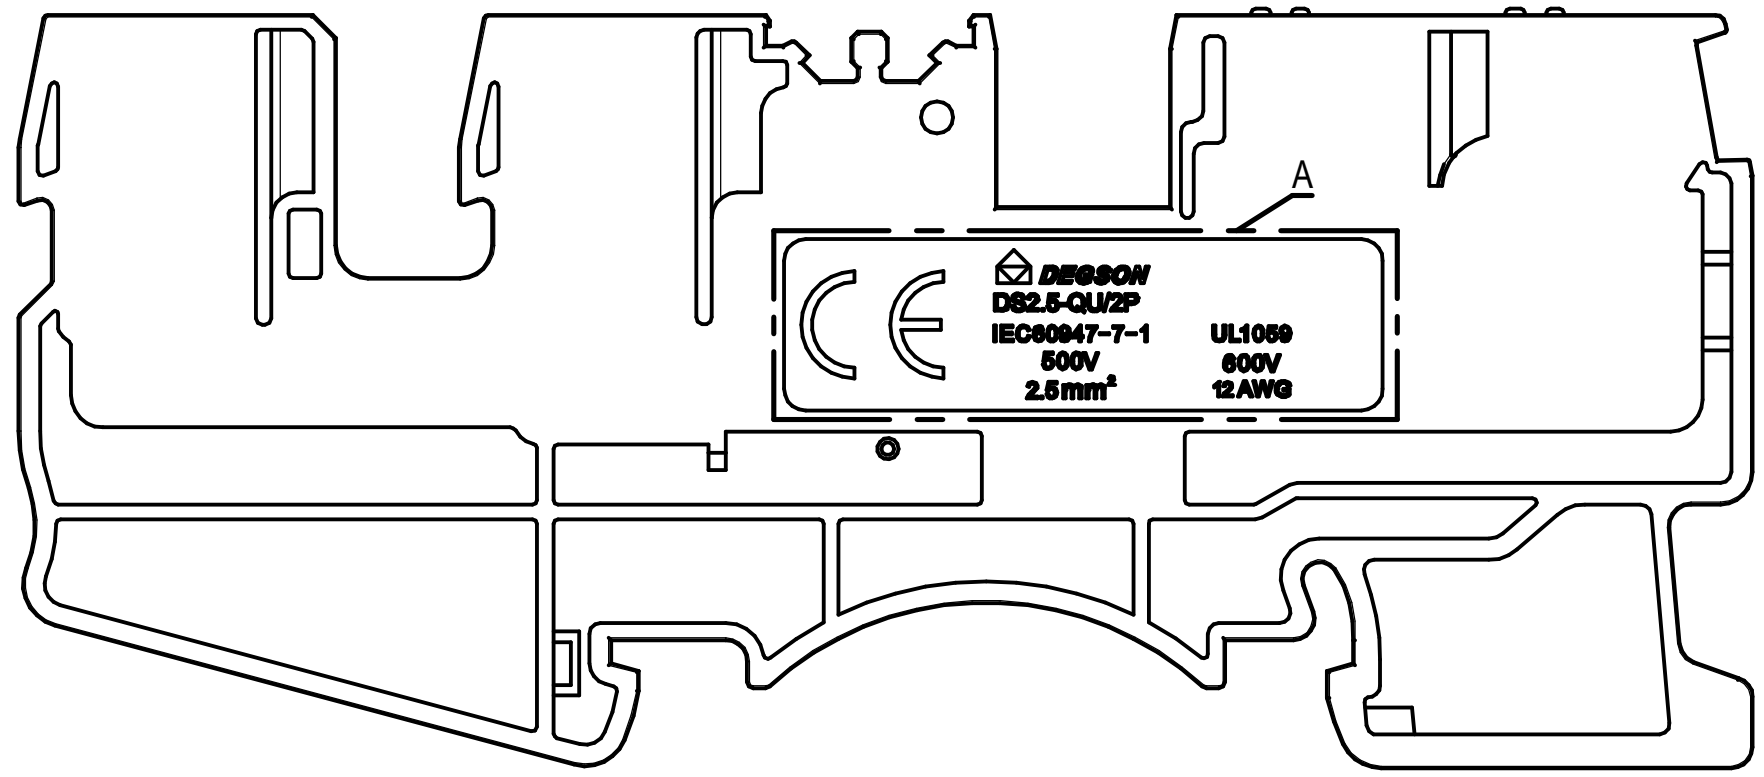

A
4:1

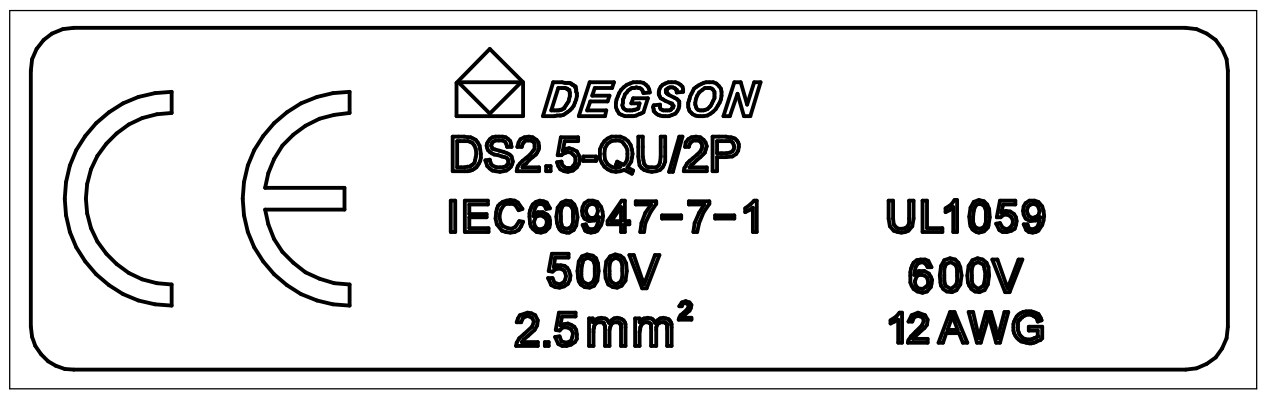

ITEM	NAME OF PART	MATERIAL	NOTES
4	Spring	Stainless steel	/
3	Current carrier	Copper	Sn Plated
2	Button	PA66+GF%	UL94V-0
1	Housing	PA66	UL94V-0

DEGSON	MATERIAL:		SURFACE/COLOR:		
	MAT NO./REV: /		MAT STATUS: 批量		
APPD: Li GL 2024.07.12	NAME: DS2.5-QU/2P-01P-1Y-00Z(H)				
CHKD: Ma EK 2024.07.12					
DRFT: Liu CB 2024.07.12	DRAWING NO. 200107289	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布	SCALE 1:1	SHEET 1/1
A3 mm (inch)					

REV	ECN	DESCRIPTION	DRFT	DATE
00		NEW DRAWING	Liu CB	2024.07.12