

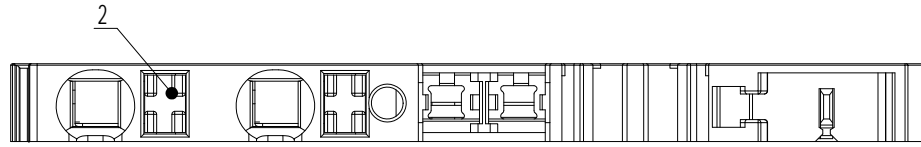


未注公差/General tolerances (mm)													0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

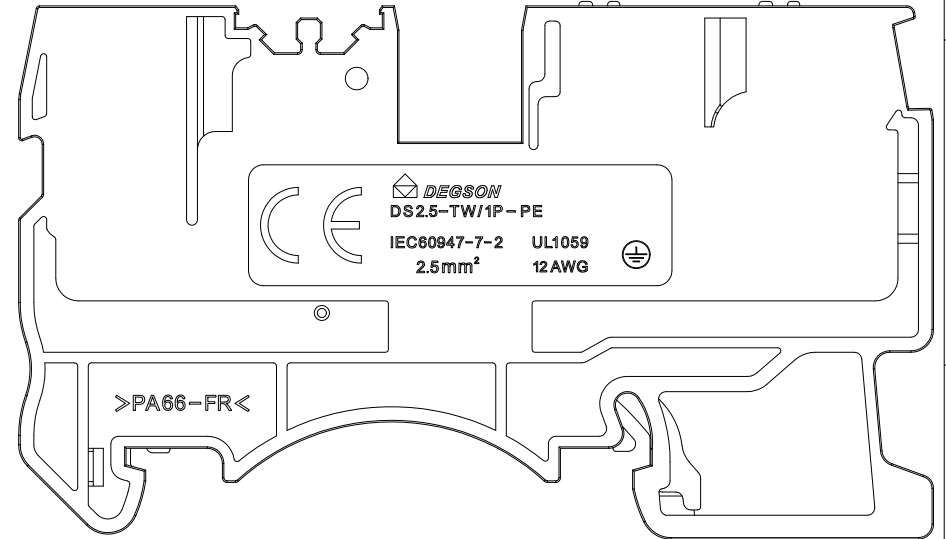

UL 标准/UL Standard	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard			
过压类别/Overtoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG mm²)	26~ 12/ 0.2- 2.5&4(SCL)		
间距/Pitch(mm)/线数范围/ Poles	5.20/1P		
剥线长度/Stripping length(mm)	10- 12		
使用温度范围/Operating temperature(°C)	-40- + 105		
符合 RoHS 环保要求/Conform to RoHS	Yes		

5	Grounding	Copper alloy	Sn Plated
4	Spring	Stainless steel	/
3	Current carrier	Copper	Sn Plated
2	Button	PA66+GF%	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

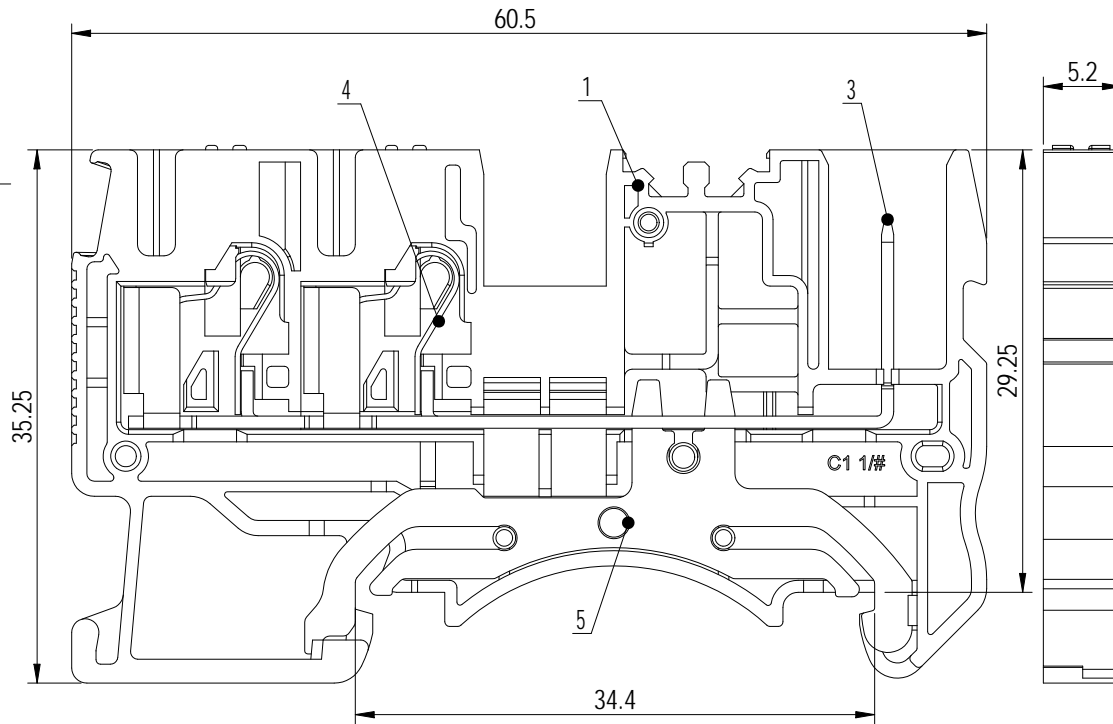

DEGSON			MATERIAL:	SURFACE/COLOR:
APPD:	Li GL	2024.08.12	MAT NO./REV:	/
CHKD:	Ma EK	2024.08.12	MAT STATUS:	批量
DRFT:	Zheng QG	2024.08.12	NAME	
			DS2.5-TW/1P-PE-01P-1Y-00Z(H)	
DRAWING NO.		TYPE	DRAWING STATUS	SCALE
200080653		CUSTOMER DRAWING	已发布	2:1
SHEET				
1/1				

REV	ECN	DESCRIPTION	DRFT	DATE
00		The first release	Zheng QG	2024.08.12

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing. All rights reserved for patent, utility model or design registrations. 除专利等明确标注外，本文件的所有权、复制、使用、分发等文件的所有权、复制、使用、分发等文件的所有权均归本公司保留。未经许可，不得复制或传播。