

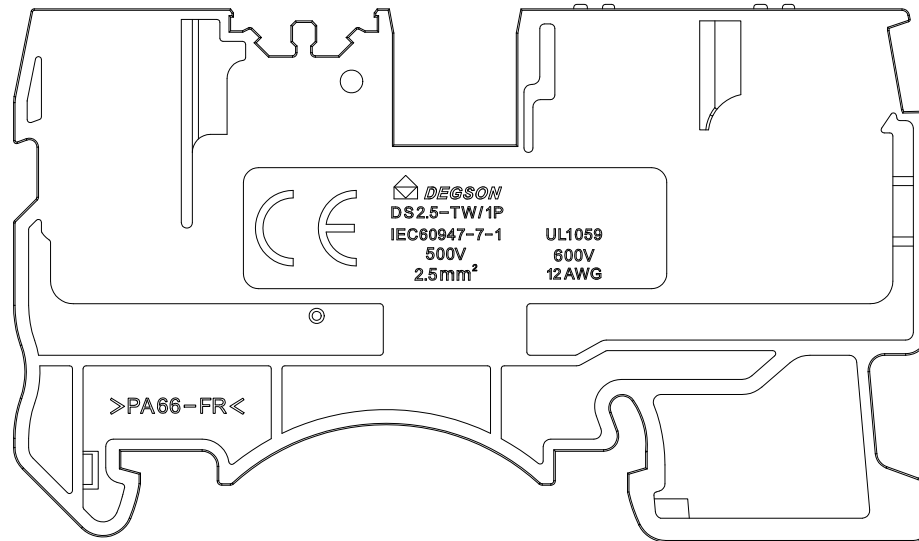



未注公差/General tolerances (mm)													0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

UL 标准/UL Standard	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/20	600/20	600/5
IEC 标准/IEC Standard			
过压类别/Overtoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	500/24	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	26~ 12/ 0.2~ 2.5&4(SCL)		
间距/Pitch(mm)/线数范围/Rows	5.2/01P		
剥线长度/Stripping length(mm)	10~ 12		
使用温度范围/Operating temperature(°C)	-40~ +105		
符合 RoHS 环保要求/Conform to RoHS	Yes		

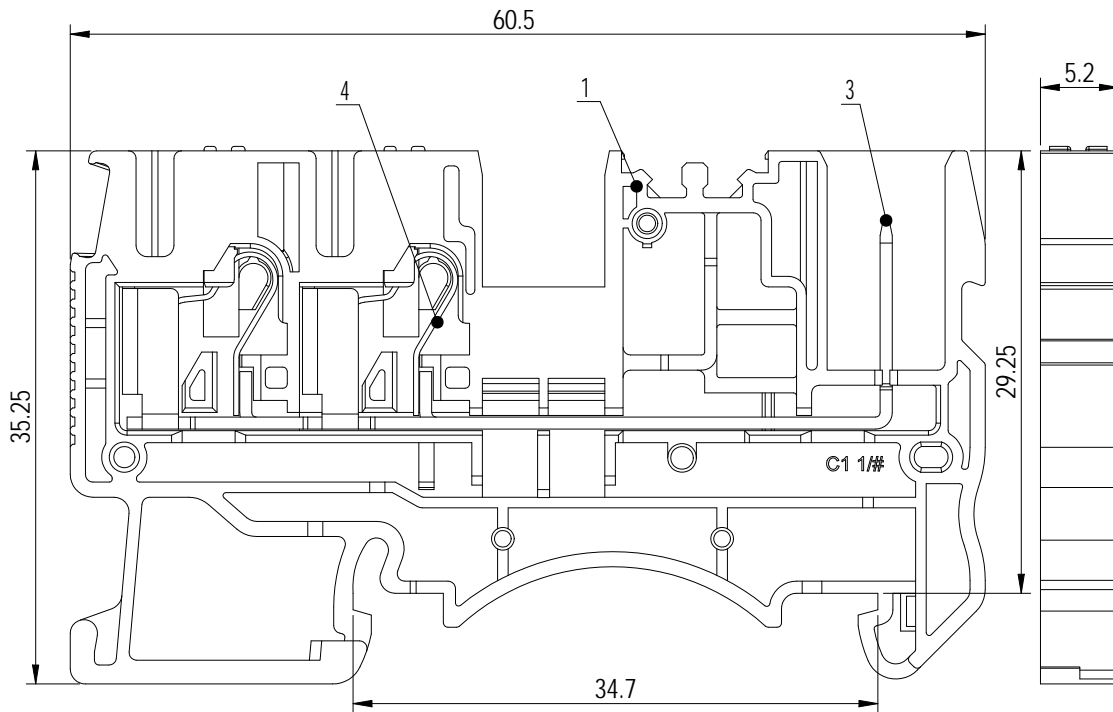

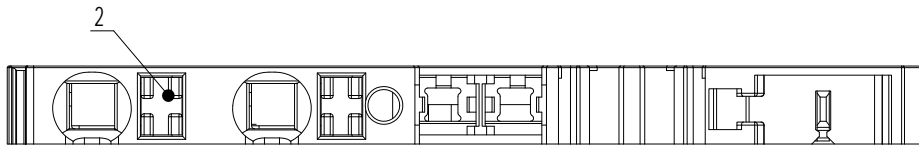

DEGSON
DS2.5-TW/1P
IEC60947-7-1
500V
2.5mm²

UL1059
600V
12AWG

>PA66-FR<

ITEM	NAME OF PART	MATERIAL	NOTES
4	Spring	Stainless steel	/
3	Current carrier	Copper	Sn Plated
2	Button	PA66+GF%	UL94V-0
1	Housing	PA66	UL94V-0

			MATERIAL:		SURFACE/COLOR:	
APPD: Li GL 2024.08.12			MAT NO./REV: /		MAT STATUS: 批量	
CHKD: Ma EK 2024.08.12			NAME			
DRFT: Zheng QG 2024.08.12			DS2.5-TW/1P-01P-1Y-00Z(H)			
DRAWING NO. 200080652		TYPE CUSTOMER DRAWING		DRAWING STATUS 已发布		SCALE 2:1
SHEET 1/1						

REV	ECN	DESCRIPTION	DRFT	DATE
00	ECN	NEW DRAWING	Zheng QG	2024.08.12

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing by DEGSON. All rights reserved for patent, utility model or design registrations. 除特别说明外, 未经许可, 不得复制或传播。 未经授权, 不得复制或传播。 保留所有权利。 所有权利保留。