

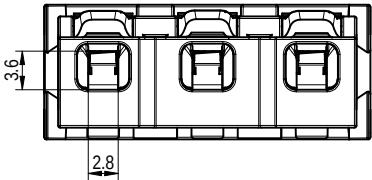
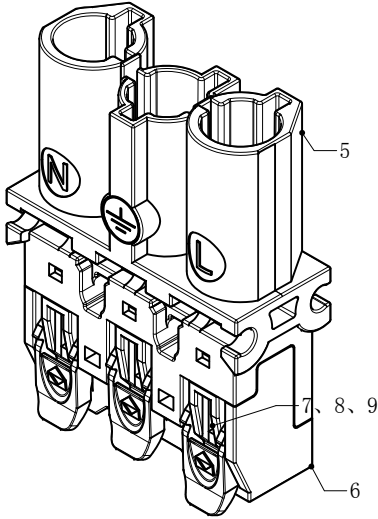
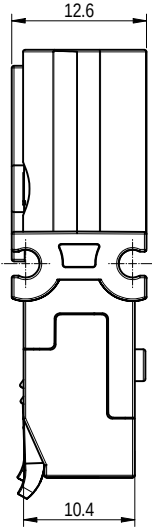
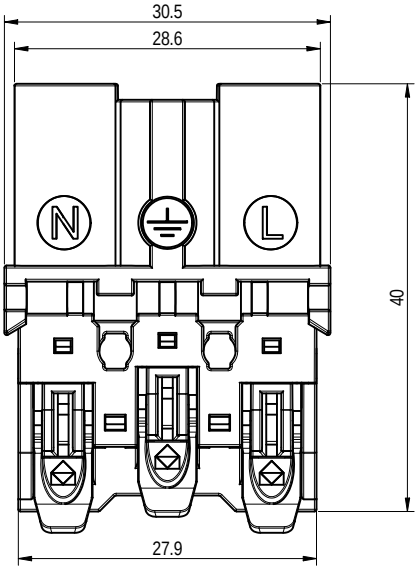


Transfer or dedication of this document as well as the utilization or reproduction of its contents are prohibited without the prior written consent of DEGSON. All rights reserved for patent.



DGBSC-PG01M&F/4-00ZH-Lock_hook Scale 1: 1



公差/公差 (General tolerances (mm))														D
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	0.1/10 ±2

6	Button	PA66	UL94V-0
5	Spring	Stainless steel	/
4	Male pin	Copper	Sn Plated
3	Cover	PA66	UL94V-0
2	Housing	PA66	UL94V-0
1	Lock_hook	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard: (UL1977)			
额定电压/电流/Rated Voltage(V)/Current(A)	600V/20A		
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II /2
额定电压/电流/Rated Voltage(V)/Current(A)	800/32	1000/32	1000/32
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	8	6
螺丝扭矩/Torque Tightening(N·m/Lb.in)	ST2.9 1.0/8.8		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	20~12 / 0.5~4		
冷压头不带绝缘套管/with femle without plastic sleeve	20~14/0.5~2.5		
冷压头带绝缘套管/with femle, with plastic sleeve	20~14/0.5~2.5		
间距/Pitch(mm)/线数范围/Poles	9.75/N=03P		
剥线长度/Stripping length(mm)	12		
使用温度范围/Operating temperature(°C)	-40~-+125		
符合RoHS环保要求/Conform to RoHS	Yes		

		MATERIAL:		SURFACE/COLOR:	
APPD: 姜耀志		2026.06.09		MAT NO./REV: / 00	
CHKD: 黄徐涛		2026.06.08		MAT STATUS: 批量	
DFT: 郑志佳		2026.06.05		NAME	
 A3		DRAWING NO.		DGBSC-PG01M/4-03P-1Y-500Z(H)	
 1/1		200453777		TYPE	
		CUSTOMER DRAWING		DRAWING STATUS	
				已发布	
				SCALE	
				1:1	
				SHEET	
				1/1	