

SPSH-M12X-XXP-MM-SF800X-00A(H)

Coding: A,B,D

Pin number: 03,04,05,
06,08,10,12

Thread specification:
001: PG9
002: M16*1.5


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

10pin A Coding	12pin A Coding	5pin B Coding	4pin D Coding
Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View

10- $\phi 0.80$	12- $\phi 0.80$		
PCB Layout	PCB Layout	PCB Layout	PCB Layout


3pin A Coding	4pin A Coding	5pin A Coding	6pin A Coding	8pin A Coding
Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View

PCB Layout	PCB Layout	PCB Layout	PCB Layout	PCB Layout




3~5pin: $\phi 1.0$
6,8pin: $\phi 0.8$
10,12pin: $\phi 0.6$

Thread specification:
PG9





Panel Mounted

Thread specification:
M16*1.5



Panel Mounted

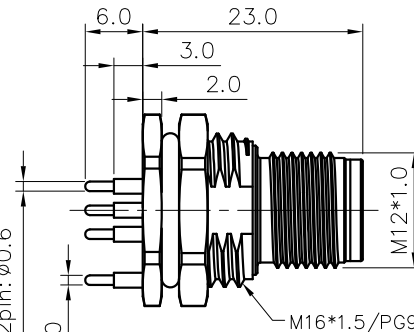

NOTES:

- Rated voltage/current :
3pin A: 250V / 4A
4pin A: 250V / 4A
5pin A: 60V / 4A
6pin A: 30V / 2A
8pin A: 30V / 2A
10pin A: 30V / 1.5A
12pin A: 30V / 1.5A
5pin B: 60V / 4A
4pin D: 250V / 4A
- Withstanding voltage :
3,4pin A: AC1500V/1Min
5pin A: AC1120V/1Min
6,8,10,12pin A: AC500V/1Min
5pin B: AC1120V/1Min
4pin D: AC1500V/1Min
- Levels of protection: IP68
- Wire connection mode: soldering(PCB)
- Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- For Panel Thickness Max: 4.5mm
- RoHS Compliance
- Tolerance : $\pm 0.5\text{mm}$

DETACHED LISTS	PART NO.: SPSHM12XXXPMMSF800X00AH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: SPSH-M12X-XXP-MM-SF800X-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.05.17	REV: D0-1	SHEET: 1/1	
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SCALE: 1:1	
		DO NOT SCALE DRAWING		