
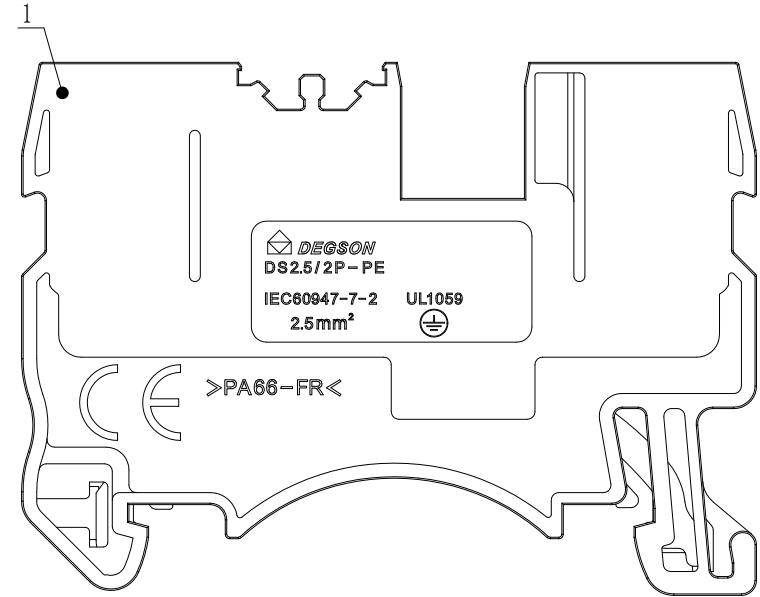
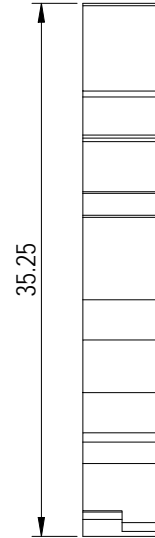
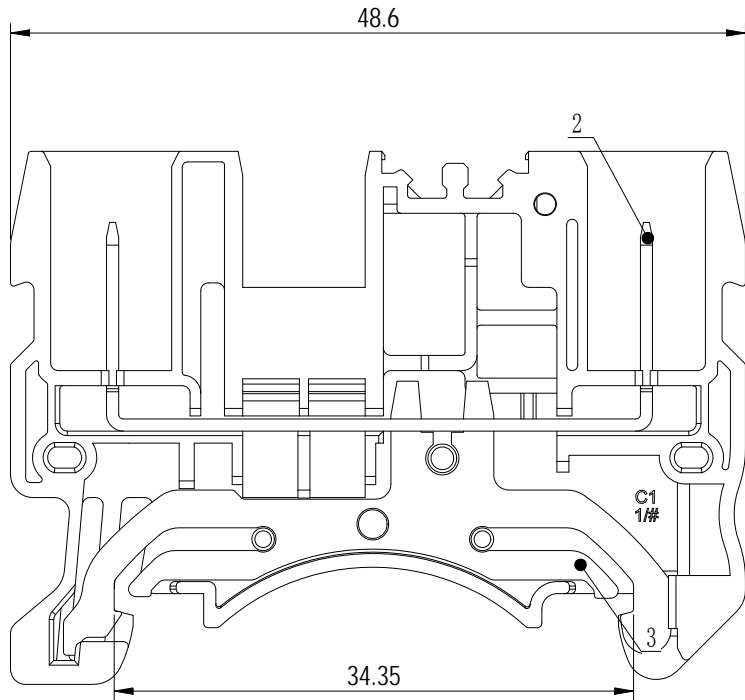


未注公差/General tolerances (mm)													0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Overtoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	/		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG mm²)	/		
间距/Pitch(mm)/线数范围/Poles	5.2/01P		
剥线长度/Stripping length(mm)	/		
使用温度范围/Operating temperature(°C)	-40~ +105		
符合 RoHS 环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE/ RAL	/		

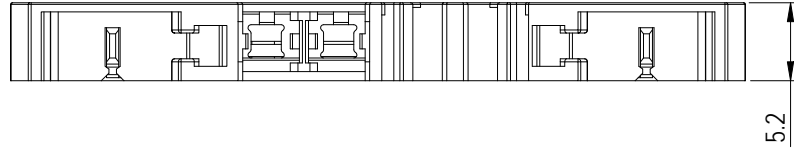

3	Grounding	Copper alloy	Sn Plated
2	Current carrier	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

			MATERIAL:		SURFACE/COLOR:	
			MAT NO./REV: /		MAT STATUS: 批量	
APPD: Li GL	2022.11.11	NAME				
CHKD: Ma EK	2022.11.11	DS2.5/2P-PE-01P-1C-00Z(H)				
DRFT: Ceng QF	2022.11.11					
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET		
200120057	CUSTOMER DRAWING	work	2:1	1/1		

00		NEW DRAWING	Ceng QF	2022.11.11
REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless expressly authorized in writing. All rights reserved for patent, utility model or design registrations. 除专利等明确标注外, 否则禁止转让、复制、引用。凡未经许可擅自复制或传播, 一经发现, 公司将依法追究其法律责任。 本公司保留对涉及发明、实用新型和外观设计的所有权利。